

DUNLOP™ INDUSTRIAL BELTS PRODUCTS GUIDE


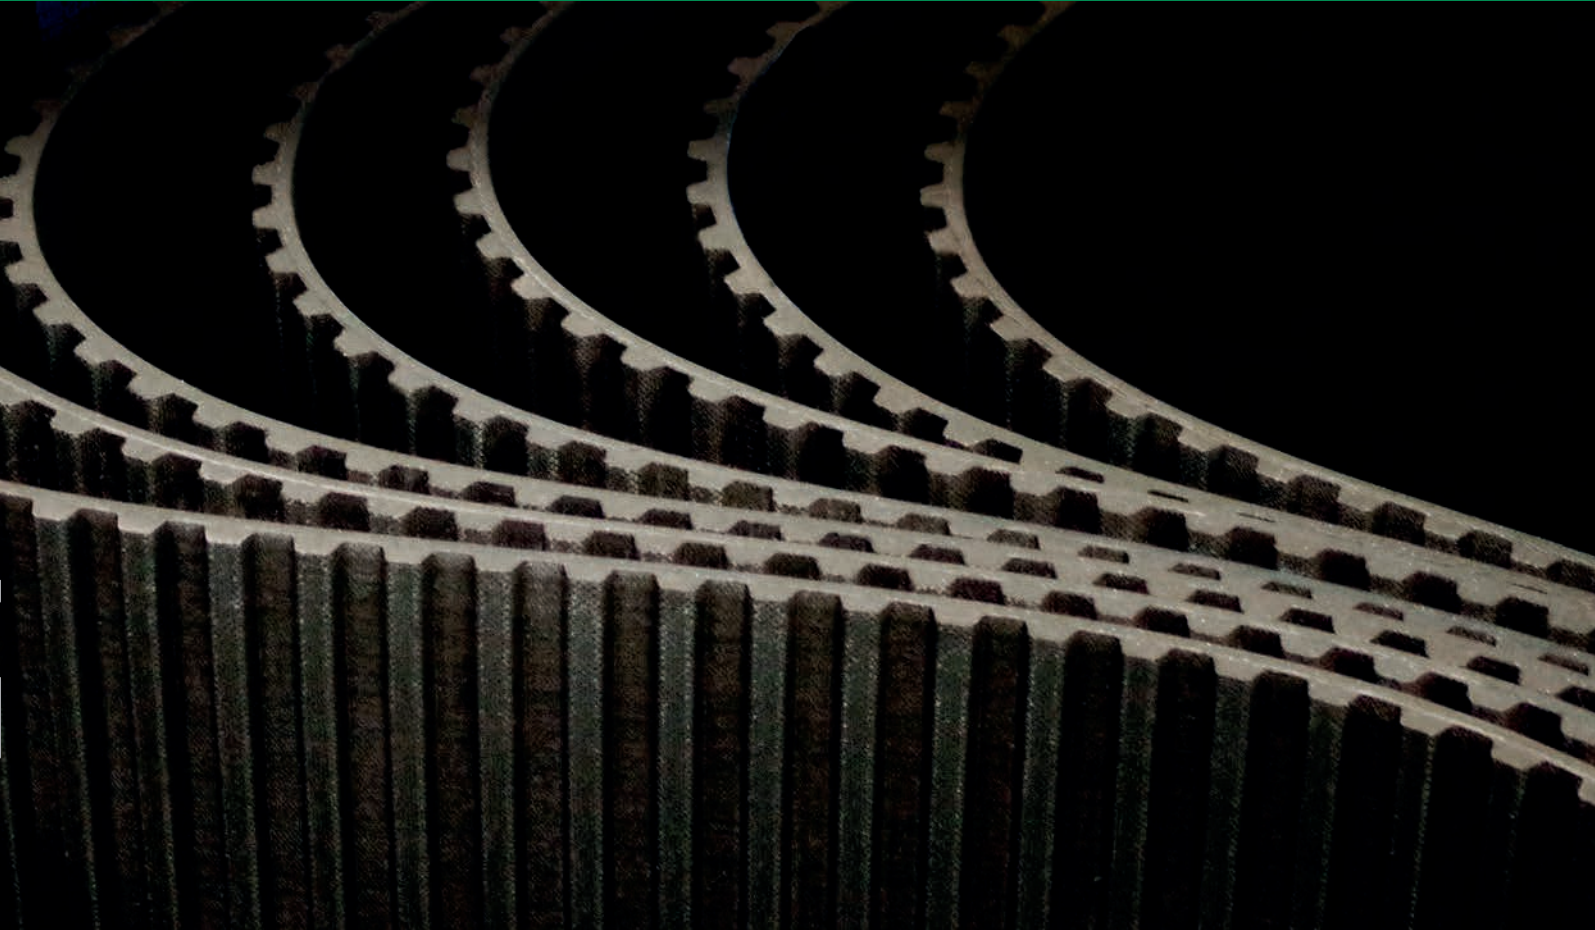



TABLE OF CONTENTS




DUNLOP™ RUBBER CHAIN RED 2



DUNLOP™ FLAT BELTS
Rubber and PU flat belts 29



DUNLOP™ TIMING BELTS
Rubber timing belts sleeve 7



DUNLOP™ PU TIMING BELTS
PU timing belts sleeves 31



DUNLOP™ TIMING BELTS ROLLS
Rubber open-end timing belts 13



DUNLOP™ PU TIMING BELTS
PU timing belts rolls 35



DUNLOP™ V-BELTS
Rubber V-belts 15



DUNLOP™ PU TIMING BELTS
True-endless timing belts 39



DUNLOP™ RIBBED BELTS
Rubber Ribbed Belts 27



DUNLOP™ PU BELTS
PU ribbed sleeves 43

DUNLOP™ RUBBER CHAIN RED REVOLUTIONARY!



DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN
DUNLOP® RUBBER CHAIN



DUNLOP™ RUBBER CHAIN RED

DUNLOP™ Industrial Belts proudly introduces the new **DUNLOP™ RBC RED** timing belt drive, the latest development in high-performance systems. It significantly improves the traditional “specific power” capacity and offers new application opportunities against alternative systems like gears or chains which always have a disadvantage in terms of weight, noise, lubrication and maintenance costs.

The starting point was the long experience accumulated with the existing **DUNLOP™ RBC YELLOW** line, well known and consolidated on the marketplace. We improved its already excellent characteristics, keeping in mind two basic assumptions:

- develop a new belt/system in rubber in order to reduce the noise level of the new drives;
- maintain the parabolic design of teeth profile to guarantee an easy up-grade of the existing drives, in the spirit and concept of interchange ability which identified, along the last years, our market approach philosophy.

In general every belt component contributes to improve the global mechanical resistance, reducing the risk of belt break or failure and granting a bigger “specific power” capacity, that means higher basic design performance. However, the tensile cords of the belt have a significant role to improve the power performance, because they support tension loads always bigger. Today hi-performance timing belts are built with tensile cords made by steel or aramide fibres.

Aramide fibres, as well known, have a very poor dimensional stability over the lifetime, thus a timing belt made with this type of tensile cords will have problems in their length (pitch) stability, which will have a negative impact on lifetime, because of the meshing error that is generated with the pulleys. On the other side, tensile cords made in steel have an excellent rigidity and dimensional stability over the lifetime, but the belt will have a very high specific weight. Furthermore, usage of steel cords in association with conventional process for rubber belt assembly, generate so many extra problems to make this type of construction unaffordable.

The new **DUNLOP™ RBC RED** is a rubber based timing belt, which solves the problems related to steel and aramide cords, thanks to the development and usage of its innovative “Dual Core” hybrid cord technology. **DUNLOP™ RBC RED** reach the highest level of performances incorporating this cord in a new rubber matrix and covering the teeth with a special and unique heavy fabric.

FEATURES

Thanks to the innovative materials used, **DUNLOP™ RBC RED** is a reliable, lower maintenance and economical alternative to drive systems with chains and gears. It is particularly recommended for efficient, compact drives with high or pulse torque loads, offering:

- Increased basic power capacity by up to 40% compared to the current **DUNLOP™ RBC YELLOW**;
- Use of existing pulleys, keeping a full functional interchange with other deep pulley profile systems, like HTD, etc.
- Allows existing drives to be upgraded without the necessity to replace the pulleys.
- Reduction of noise thanks to narrower belts due to the higher performance rating of the system. Under the same transmission conditions, **DUNLOP™ RBC RED** has the same noise level as **DUNLOP™ RBC YELLOW**;
- Low noise characteristics compared to drive systems using polyurethane, steel etc. due to the rubber matrix and its teeth with the parabolic profile shape, recognised as the quietest system on the market
- A wide, continuous range of possible operating temperature, like no other system, which makes **DUNLOP™ RBC RED** the only solution for extreme working conditions.



DUNLOP™ RUBBER CHAIN RED

STRUCTURE

The new **DUNLOP™ RBC RED** is made with the most innovative materials of the highest quality. The extensive development and tests performed has resulted in the homogeneous integration of all the components, the cohesive bond of which imparts superior load capacity to **DUNLOP™ RBC RED**, providing to the users the maximum performance level nowadays available:

- the highest belt tension and length stability;
- longer drive lifetime due to the higher power capacity and flex fatigue resistance;
- more compact and lightweight drives under the same power ratings;
- exceptional resistance to abrasion and tooth shear under pulse loads;
- full functional interchange with all the other major deep pulley profile systems;
- no stocking and packaging constraints.

THE BELT BODY 1 4

An innovative design and blend of HNBR elastomers, uniquely cross-linked to increase teeth rigidity and shear resistance, up to +25% in comparison to RBC YELLOW belts. Despite the high levels of rigidity and hardness, this compound guarantees an exceptional resistance to flex fatigue, preventing the appearance of cracks when working with very small pulleys.

Tests made have showed an incredible improvement in the flex fatigue resistance up to 10 times more than the previous YELLOW version, running on the smallest pulley diameters under the same load conditions.

Furthermore this compound is formulated to considerably resist the effects of mineral oils (test conditions 22h at 100°C in ASTM3 oil; -25% less absorption than RBC YELLOW), offering an incredible wide range of working temperatures: from -35° C to +115° C.

TENSION MEMBERS 2

The tensile member is made out of the innovative “Dual Core” hybrid cord technology and it constitutes the load carrying elements inside the New **DUNLOP™ RBC RED** belt.


The “Dual Core” technology gives excellent characteristics to this cord, which grant to **DUNLOP™ RBC RED** extreme dimension stability under static and dynamic tensions, together with a superior flex fatigue resistance.

These performances can eliminate any kind of re-tensioning procedure, providing a real maintenance-free operation and guarantying always a perfect tooth meshing for long lasting service with reduction of abrasion, vibrations and noise.

The higher elastic modulus of **DUNLOP™ RBC RED**, on average +25% rigid than YELLOW, and its superior flexibility, allows consequently more compact drives and durability.

TOOTH FACING FABRIC 3

A hard-wearing polyamide fabric is bonded to the tooth surface, to improve torque carrying capacity and tooth shear resistance. Its special surface impregnation process confers self-lubricating properties, a lower friction and increased drive efficiency.

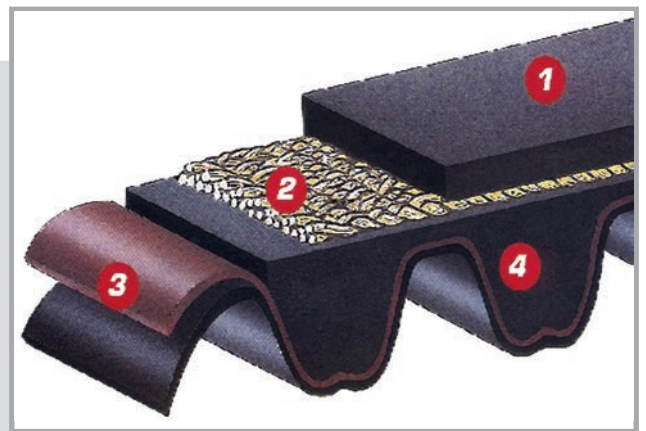

DUNLOP™ RUBBER CHAIN RED

The **DUNLOP™ RBC RED** belt is defined by the following parameters [figure 1]:

BELT PITCH:

The distance P in millimeters between two adjacent tooth centres as measured along the pitch line of the belt.

BELT PITCH LENGTH:

The total length (circumference) of the belt in millimeters as measured along the pitch line (the theoretical pitch line of **DUNLOP™ RBC RED** lies within the tensile member).

The pitch length is a parameter that identifies univocally a TIMING drive belt; to measure a belt it's necessary a suitable measuring equipment, as specified in the standard ISO/FDIS 13050:1999 (E).

BELT WIDTH:

The width of the belt measured in millimeters.

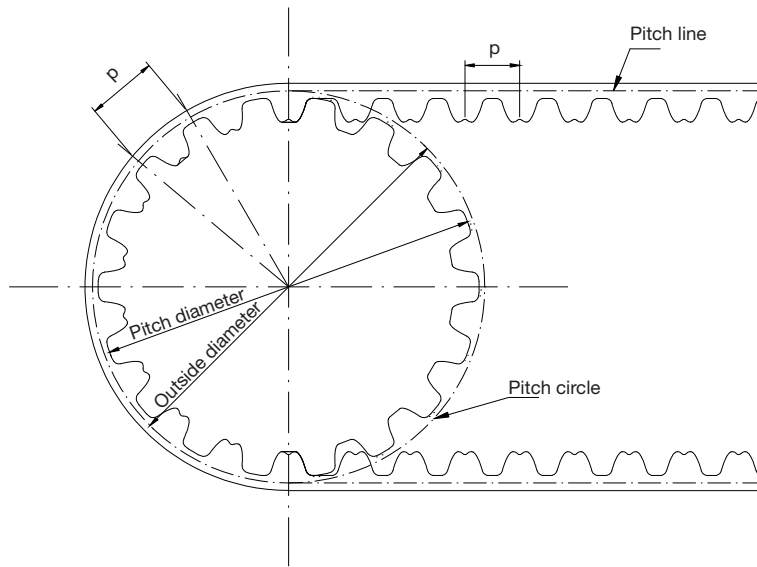


Figure 1

The new **DUNLOP™ RBC RED** belt is consequently identified and coded as follow:

1400	RBC RED14	55	
			the belt width in millimeters
			the belt pitch in millimeters
			the belt family type and construction
			the belt pitch length in millimeters

DUNLOP™ RUBBER CHAIN RED

The new **DUNLOP™ RBC RED** belts adopt by default for their teeth shape, the innovative RPC parabolic profile, an evolution of the well know RPP profile, of which retains the basic principle, enlarging meanwhile the interchange possibility with also all those pulleys having a deep groove profile of latest generation.

RPC maintain the basic parabolic design of teeth profile to guarantee an easy up-grade of the existing RPP drives, in the spirit and concept of full drive interchange, thus the RPC based **DUNLOP™ RBC RED** system will continue to work perfectly on the current RBC pulleys.

The **DUNLOP™ RBC RED** nominal belt tooth shape and reference are shown given in Figure 2, while the dimension data are listed below in Table Dimensions for each available pitch.

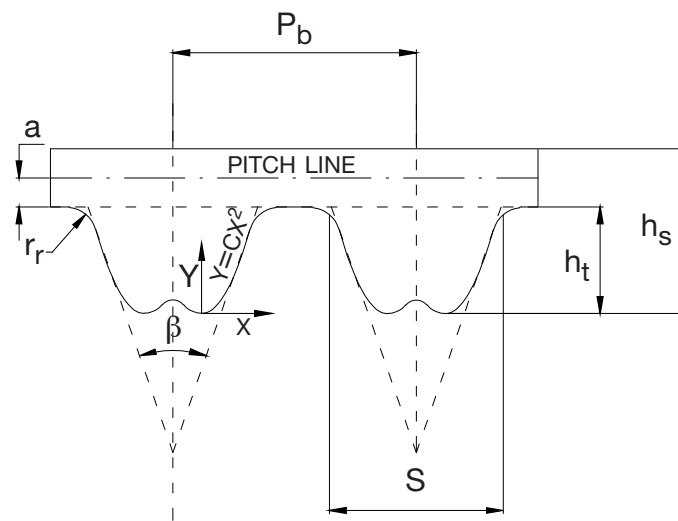


Figure 2

Belt type	Pitch	β	S	h_s	h_t	r_r	a
8 M	8 mm	32°	5,4	5,4	3,46	0,85	0,8
14 M	14 mm	32°	9,5	9,7	6,1	1,5	1,4

DUNLOP™ TIMING BELTS
Rubber timing belts sleeves



DUNLOP™ TIMING BELTS

Rubber timing belts sleeves




DUNLOP™ Rubber timing belts are available with single or double sided teeth, in classical and RPP profiles. They are manufactured using the most advanced technology available.

DUNLOP™ CLASSICAL TIMING MXL XL L H XH XXH

- Trapezoidal tooth profile
- Polychloroprene teeth for accurate meshing
- Fiberglass reinforcement for minimal elongation
- Nylon fabric protecting tooth surface

DUNLOP™ RBC3 RBC5 RBC8 RBC14 RBC20


- RPP parabolic tooth profile gives graduated pressure increase over tooth height
- Fiberglass reinforcement for minimal elongation and high flexibility
- Chloroprene rubber for wear resistance and increased service life
- Nylon fabric protecting tooth surface, with self lubrication

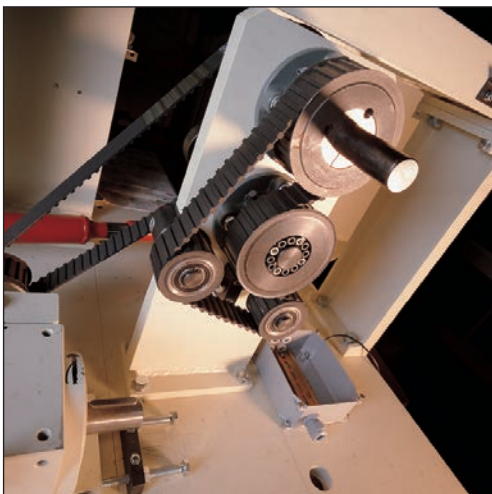

The new timing belts **DUNLOP™ RBC BLUE** and **DUNLOP™ RBC YELLOW** are constructed with the highest quality materials.

DUNLOP™ RBC BLUE and DUNLOP™ RBC YELLOW advantages:

- Upgrade the existing transmission without changing the pulleys
- Perfect interchangeability with parabolic and deep pulley profile
- Antistatic Properties conforming to the BS 2050
- Drive energy efficiency up to 98%
- Excellent for backside idlers
- Higher tooth jump resistance
- Increased resistance to tooth shear
- Quiet, maintenance-free operation

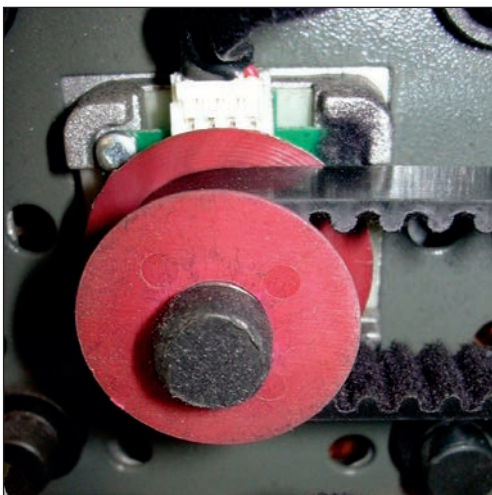

DUNLOP™ RBC BLUE are available in pitches 5, 8 and 14 mm. **DUNLOP™ RBC YELLOW** are available in pitches 8 and 14 mm (on request 5 mm).


RBC 5 BLUE DD, RBC 8 BLUE DD and RBC 14 BLUE DD are produceable on request.



DUNLOP™ TIMING BELTS

Rubber timing belts sleeves

RBC3 - RBC5 - RBC8 - RBC14
 RBC20 - RBC5 BLUE
 RBC8 BLUE - RBC14 BLUE RBC8
 YELLOW - RBC14 YELLOW



RBC3	
Code	Pitch length (mm)
90 RBC3	90
105 RBC3	105
129 RBC3	129
141 RBC3	141
144 RBC3	144
147 RBC3	147
150 RBC3	150
159 RBC3	159
168 RBC3	168
174 RBC3	174
177 RBC3	177
180 RBC3	180
186 RBC3	186
195 RBC3	195
201 RBC3	201
204 RBC3	204
210 RBC3	210
213 RBC3	213
225 RBC3	225
231 RBC3	231
240 RBC3	240
243 RBC3	243
246 RBC3	246
249 RBC3	249
252 RBC3	252
255 RBC3	255
261 RBC3	261
264 RBC3	264
267 RBC3	267
270 RBC3	270
276 RBC3	276
285 RBC3	285
288 RBC3	288
291 RBC3	291
297 RBC3	297
300 RBC3	300
312 RBC3	312
318 RBC3	318
327 RBC3	327
330 RBC3	330
333 RBC3	333
336 RBC3	336
339 RBC3	339
345 RBC3	345
357 RBC3	357
363 RBC3	363
375 RBC3	375
384 RBC3	384
390 RBC3	390
393 RBC3	393
405 RBC3	405
420 RBC3	420
432 RBC3	432
447 RBC3	447
474 RBC3	474
480 RBC3	480
486 RBC3	486
489 RBC3	489
495 RBC3	495
501 RBC3	501
510 RBC3	510
513 RBC3	513
522 RBC3	522
531 RBC3	531
537 RBC3	537
564 RBC3	564
570 RBC3	570
576 RBC3	576
579 RBC3	579
582 RBC3	582
597 RBC3	597
600 RBC3	600
633 RBC3	633
648 RBC3	648
669 RBC3	669
711 RBC3	711
735 RBC3	735
738 RBC3	738
756 RBC3	756
804 RBC3	804
882 RBC3	882
945 RBC3	945

RBC3	
Code	Pitch length (mm)
1062RBC3	1062
1125RBC3	1125
1245 RBC3	1245
1263 RBC3	1263
1500 RBC3	1500
1530 RBC3	1530
1863 RBC3	1863

P	3
H1	1,15
H	2,4

RBC5	
Code	Pitch length (mm)
180 RBC5	180
225 RBC5	225
235 RBC5	235
245 RBC5	245
255 RBC5	255
265 RBC5	265
270 RBC5	270
280 RBC5	280
285 RBC5	285
295 RBC5	295
300 RBC5	300
305 RBC5	305
325 RBC5	325
345 RBC5	345
350 RBC5	350
375 RBC5	375
400 RBC5	400
420 RBC5	420
425 RBC5	425
450 RBC5	450
455 RBC5	455
460 RBC5	460
465 RBC5	465
475 RBC5	475
500 RBC5	500
525 RBC5	525
535 RBC5	535
565 RBC5	565
575 RBC5	575
580 RBC5	580
600 RBC5	600
610 RBC5	610
615 RBC5	615
635 RBC5	635
640 RBC5	640
670 RBC5	670
675 RBC5	675
700 RBC5	700
705 RBC5	705
710 RBC5	710
725 RBC5	725
740 RBC5	740
750 RBC5	750
755 RBC5	755
800 RBC5	800
835 RBC5	835
850 RBC5	850
890 RBC5	890
900 RBC5	900
935 RBC5	935
940 RBC5	940
950 RBC5	950
980 RBC5	980
1000 RBC5	1000
1025 RBC5	1025
1050 RBC5	1050
1100 RBC5	1100
1125 RBC5	1125
1135 RBC5	1135
1195 RBC5	1195
1200 RBC5	1200
1240 RBC5	1240
1270 RBC5	1270
1420 RBC5	1420
1500 RBC5	1500
1595 RBC5	1595
1605 RBC5	1605
1690 RBC5	1690
1790 RBC5	1790
1800 RBC5	1800
1870 RBC5	1870
1895 RBC5	1895
1945 RBC5	1945
2000 RBC5	2000
2250 RBC5	2250
2525 RBC5	2525

P	5
H1	2
H	3,8

RBC8	
Code	Pitch length (mm)
288 RBC8	288
320 RBC8	320
352 RBC8	352
360 RBC8	360
384 RBC8	384
408 RBC8	408
416 RBC8	416
456 RBC8	456
480 RBC8	480
536 RBC8	536
544 RBC8	544
560 RBC8	560
600 RBC8	600
608 RBC8	608
632 RBC8	632
640 RBC8	640
680 RBC8	680
720 RBC8	720
760 RBC8	760
800 RBC8	800
840 RBC8	840
880 RBC8	880
896 RBC8	896
920 RBC8	920
960 RBC8	960
1000 RBC8	1000
1040 RBC8	1040
1080 RBC8	1080
1120 RBC8	1120
1200 RBC8	1200
1224 RBC8	1224
1280 RBC8	1280
1352 RBC8	1352
1424 RBC8	1424
1440 RBC8	1440
1464 RBC8	1464
1600 RBC8	1600
1680 RBC8	1680
1760 RBC8	1760
1800 RBC8	1800
1904 RBC8	1904
2000 RBC8	2000
2200 RBC8	2200
2272 RBC8	2272
2400 RBC8	2400
2520 RBC8	2520
2600 RBC8	2600
2800 RBC8	2800
3048 RBC8	3048
3280 RBC8	3280
3600 RBC8	3600
4400 RBC8	4400

P	8
H1	3,2
H	5,4

DUNLOP™ TIMING BELTS

Rubber timing belts sleeves

RBC14	
Code	Pitch length (mm)
966 RBC14	966
994 RBC14	994
1092 RBC14	1092
1106 RBC14	1106
1190 RBC14	1190
1260 RBC14	1260
1288 RBC14	1288
1344 RBC14	1344
1400 RBC14	1400
1442 RBC14	1442
1568 RBC14	1568
1610 RBC14	1610
1750 RBC14	1750
1764 RBC14	1764
1778 RBC14	1778
1848 RBC14	1848
1890 RBC14	1890
1904 RBC14	1904
1960 RBC14	1960
2100 RBC14	2100
2240 RBC14	2240
2310 RBC14	2310
2380 RBC14	2380
2450 RBC14	2450
2590 RBC14	2590
2660 RBC14	2660
2800 RBC14	2800
2968 RBC14	2968
3150 RBC14	3150
3360 RBC14	3360
3500 RBC14	3500
3850 RBC14	3850
3920 RBC14	3920
4326 RBC14	4326
4578 RBC14	4578
4956 RBC14	4956

P	14
H ₁	6
H	9,7

RBC5 BLU	
Code	Pitch length (mm)
180-BLU5	180
225-BLU5	225
235-BLU5	235
245-BLU5	245
255-BLU5	255
265-BLU5	265
270-BLU5	270
280-BLU5	280
285-BLU5	285
295-BLU5	295
300-BLU5	300
305-BLU5	305
325-BLU5	325
345-BLU5	345
350-BLU5	350
375-BLU5	375
400-BLU5	400
420-BLU5	420
425-BLU5	425
450-BLU5	450
455-BLU5	455
460-BLU5	460
465-BLU5	465
475-BLU5	475
500-BLU5	500
525-BLU5	525
535-BLU5	535
565-BLU5	565
575-BLU5	575
580-BLU5	580
600-BLU5	600
610-BLU5	610
615-BLU5	615
635-BLU5	635
640-BLU5	640
670-BLU5	670
675-BLU5	675
700-BLU5	700
705-BLU5	705
710-BLU5	710
725-BLU5	725
740-BLU5	740
750-BLU5	750
755-BLU5	755
800-BLU5	800
835-BLU5	835
850-BLU5	850
890-BLU5	890
900-BLU5	900
935-BLU5	935
940-BLU5	940
950-BLU5	950
980-BLU5	980
1000-BLU5	1000
1025-BLU5	1025
1050-BLU5	1050
1100-BLU5	1100
1125-BLU5	1125
1135-BLU5	1135
1195-BLU5	1195
1200-BLU5	1200
1240-BLU5	1240
1270-BLU5	1270
1420-BLU5	1420
1500-BLU5	1500
1595-BLU5	1595
1605-BLU5	1605
1690-BLU5	1690
1790-BLU5	1790
1800-BLU5	1800
1870-BLU5	1870
1895-BLU5	1895
1945-BLU5	1945
2000-BLU5	2000
2250-BLU5	2250
2525-BLU5	2525

P	5
H ₁	2
H	3,8

RBC8 BLUE	
Code	Pitch length (mm)
288-BLU8	288
320-BLU8	320
352-BLU8	352
360-BLU8	360
384-BLU8	384
408-BLU8	408
416-BLU8	416
456-BLU8	456
480-BLU8	480
536-BLU8	536
544-BLU8	544
560-BLU8	560
600-BLU8	600
608-BLU8	608
632-BLU8	632
640-BLU8	640
680-BLU8	680
720-BLU8	720
800-BLU8	800
840-BLU8	840
880-BLU8	880
896-BLU8	896
920-BLU8	920
960-BLU8	960
1000-BLU8	1000
1040-BLU8	1040
1080-BLU8	1080
1120-BLU8	1120
1200-BLU8	1200
1224-BLU8	1224
1280-BLU8	1280
1352-BLU8	1352
1424-BLU8	1424
1440-BLU8	1440
1464-BLU8	1464
1600-BLU8	1600
1680-BLU8	1680
1760-BLU8	1760
1800-BLU8	1800
2000-BLU8	2000
2200-BLU8	2200
2272-BLU8	2272
2400-BLU8	2400
2520-BLU8	2520
2600-BLU8	2600
2800-BLU8	2800
3048-BLU8	3048
3280-BLU8	3280
3600-BLU8	3600
4400-BLU8	4400

P	8
H ₁	3,2
H	5,4

RBC14 BLUE	
Code	Pitch length (mm)
966-BLU14	966
994-BLU14	994
1092-BLU14	1092
1106-BLU14	1106
1190-BLU14	1190
1260-BLU14	1260
1288-BLU14	1288
1344-BLU14	1344
1400-BLU14	1400
1442-BLU14	1442
1568-BLU14	1568
1610-BLU14	1610
1750-BLU14	1750
1764-BLU14	1764
1778-BLU14	1778
1848-BLU14	1848
1890-BLU14	1890
1904-BLU14	1904
1960-BLU14	1960
2100-BLU14	2100
2240-BLU14	2240
2310-BLU14	2310
2380-BLU14	2380
2450-BLU14	2450
2590-BLU14	2590
2660-BLU14	2660
2800-BLU14	2800
2968-BLU14	2968
3150-BLU14	3150
3360-BLU14	3360
3500-BLU14	3500
3850-BLU14	3850
3920-BLU14	3920
4326-BLU14	4326
4578-BLU14	4578
4956-BLU14	4956


P	14
H ₁	6
H	9,7

RBC8 YELLOW	
Code	Pitch length (mm)
288-YLW8	288
320-YLW8	320
352-YLW8	352
360-YLW8	360
384-YLW8	384
408-YLW8	408
416-YLW8	416
456-YLW8	456
480-YLW8	480
536-YLW8	536
544-YLW8	544
560-YLW8	560
600-YLW8	600
608-YLW8	608
632-YLW8	632
640-YLW8	640
680-YLW8	680
720-YLW8	720
800-YLW8	800
840-YLW8	840
880-YLW8	880
896-YLW8	896
920-YLW8	920
960-YLW8	960
1000-YLW8	1000
1040-YLW8	1040
1080-YLW8	1080
1120-YLW8	1120
1200-YLW8	1200
1224-YLW8	1224
1280-YLW8	1280
1352-YLW8	1352
1424-YLW8	1424
1440-YLW8	1440
1464-YLW8	1464
1600-YLW8	1600
1680-YLW8	1680
1760-YLW8	1760
1800-YLW8	1800
2000-YLW8	2000
2200-YLW8	2200
2272-YLW8	2272
2400-YLW8	2400
2520-YLW8	2520
2600-YLW8	2600
2800-YLW8	2800
3048-YLW8	3048
3280-YLW8	3280
3600-YLW8	3600
4400-YLW8	4400

P	8
H ₁	3,2
H	5,4

RBC14 YELLOW	
Code	Pitch length (mm)
966-YLW14	966
994-YLW14	994
1092-YLW14	1092
1106-YLW14	1106
1190-YLW14	1190
1260-YLW14	1260
1288-YLW14	1288
1344-YLW14	1344
1400-YLW14	1400
1442-YLW14	1442
1568-YLW14	1568
1610-YLW14	1610
1750-YLW14	1750
1764-YLW14	1764
1778-YLW14	1778
1848-YLW14	1848
1890-YLW14	1890
1904-YLW14	1904
1960-YLW14	1960
2100-YLW14	2100
2240-YLW14	2240
2310-YLW14	2310
2380-YLW14	2380
2450-YLW14	2450
2590-YLW14	2590
2660-YLW14	2660
2800-YLW14	2800
2968-YLW14	2968
3150-YLW14	3150
3360-YLW14	3360
3500-YLW14	3500
3850-YLW14	3850
3920-YLW14	3920
4326-YLW14	4326
4578-YLW14	4578
4956-YLW14	4956


P	14
H ₁	6
H	9,7

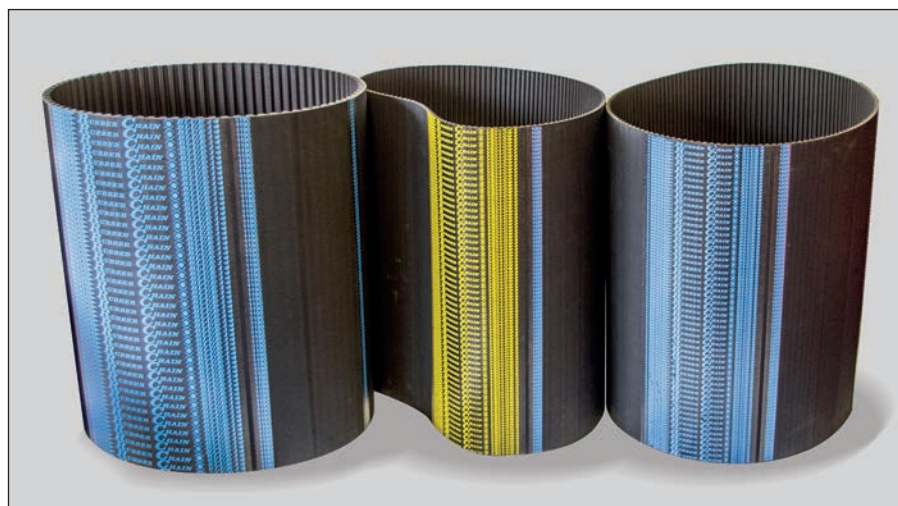


DUNLOP™ TIMING BELTS

Rubber timing belts sleeves


MXL - XL - L - H - XXH



XLDD - LDD - HDD



RBC5 DD - RBC8 DD - RBC14 DD



MXL	
Code	Pitch length (mm)
360 MXL	91,44
432 MXL	109,73
440 MXL	111,76
456 MXL	115,82
480 MXL	121,92
488 MXL	123,95
496 MXL	125,98
536 MXL	136,14
544 MXL	138,18
576 MXL	146,30
584 MXL	148,34
608 MXL	154,43
632 MXL	160,53
640 MXL	162,56
656 MXL	166,62
664 MXL	168,66
680 MXL	172,72
704 MXL	178,82
720 MXL	182,88
736 MXL	186,94
752 MXL	191,00
760 MXL	193,04
776 MXL	197,10
800 MXL	203,20
808 MXL	205,23
824 MXL	209,30
840 MXL	213,36
880 MXL	223,52
888 MXL	225,55
912 MXL	231,65
920 MXL	233,68
944 MXL	239,78
952 MXL	241,81
960 MXL	243,84
976 MXL	247,90
984 MXL	249,94
1000 MXL	254,00
1008 MXL	256,03
1016 MXL	258,06
1040 MXL	264,16
1056 MXL	268,22
1072 MXL	272,29
1120 MXL	284,48
1160 MXL	294,64
1176 MXL	298,70
1184 MXL	300,74
1200 MXL	304,80
1224 MXL	310,90
1280 MXL	325,12
1400 MXL	355,60
1472 MXL	373,89
1496 MXL	379,98
1520 MXL	386,08
1600 MXL	406,40
1680 MXL	426,72
1696 MXL	430,78
1768 MXL	449,07
1800 MXL	457,20
1832 MXL	465,33
1856 MXL	471,42
1888 MXL	479,55
1984 MXL	503,94
1992 MXL	505,97
2048 MXL	520,19
2240 MXL	568,96
2360 MXL	599,44
2384 MXL	605,54
2480 MXL	629,92
2496 MXL	633,98
2520 MXL	640,08
2584 MXL	656,34
2776 MXL	705,10
2864 MXL	727,46
2880 MXL	731,52
2976 MXL	755,90
3064 MXL	778,26
3104 MXL	788,42
3200 MXL	812,80
3296 MXL	837,18
3424 MXL	869,70
3472 MXL	881,89
3480 MXL	883,92

MXL	
Code	Pitch length (mm)
3520 MXL	894,08
3632 MXL	922,53
3704 MXL	940,82
3944 MXL	1001,78
4000 MXL	1016,00
4064 MXL	1032,26
4200 MXL	1066,80
4280 MXL	1087,12
4320 MXL	1097,28
4456 MXL	1131,82
4736 MXL	1202,94
4800 MXL	1219,20
5224 MXL	1326,90

P	2,032
H ₁	0,51
H	1,14

XL	
Code	Pitch length (mm)
54 XL	137,16
60 XL	152,40
70 XL	177,80
80 XL	203,20
90 XL	228,60
98 XL	248,92
100 XL	254,00
102 XL	259,08
104 XL	264,16
106 XL	269,24
110 XL	279,40
120 XL	304,80
130 XL	330,20
140 XL	355,60
146 XL	370,84
150 XL	381,00
156 XL	396,24
160 XL	406,40
170 XL	431,80
176 XL	447,04
180 XL	457,20
182 XL	462,28
188 XL	477,52
190 XL	482,60
198 XL	502,92
200 XL	508,00
202 XL	513,08
210 XL	533,40
212 XL	538,48
214 XL	543,56
220 XL	558,80
228 XL	579,12
230 XL	584,20
234 XL	594,36
240 XL	609,60
250 XL	635,00
260 XL	660,40
270 XL	685,80
276 XL	701,04
290 XL	736,60
310 XL	787,40
316 XL	802,64
320 XL	812,80
330 XL	838,20
344 XL	873,76
352 XL	894,08
364 XL	924,56
380 XL	965,20
384 XL	975,36
388 XL	985,52
390 XL	990,60
392 XL	995,68
434 XL	1102,36
460 XL	1168,40
530 XL	1346,20
600 XL	1524,00
710 XL	1803,40

P	5,08
H ₁	1,27
H	2,4

L	
Code	Pitch length (mm)
124 L	314,96
135 L	342,90
150 L	381,00
173 L	439,42
187 L	476,25
202 L	513,80
210 L	533,40
225 L	571,50
240 L	609,60
255 L	647,70
270 L	685,80
285 L	723,90
300 L	762,00
322 L	819,15
334 L	848,36
345 L	876,30
367 L	933,45
390 L	990,60
405 L	1028,70
412 L	1047,75
420 L	1066,80
450 L	1143,00
480 L	1219,20
510 L	1295,40
540 L	1371,60
600 L	1524,00
728 L	1847,85
817 L	2076,45

P	9,525
H ₁	1,91
H	3,6

H	
Code	Pitch length (mm)
240 H	609,60
270 H	685,80
300 H	762,00
330 H	838,00
360 H	914,40
390 H	990,60
420 H	1066,80
450 H	1143,00
480 H	1219,20
510 H	1295,40
540 H	1371,60
570 H	1447,80
600 H	1524,00
630 H	1600,20
660 H	1676,40
670 H	1701,80
700 H	1778,00
725 H	1841,50
750 H	1905,00
800 H	2032,00
850 H	2159,00
900 H	2286,00
1000 H	2540,00
1100 H	2794,00
1120 H	2844,80
1140 H	2895,60
1150 H	2921,00
1250 H	3175,00
1400 H	3556,00
1645 H	4178,30
1700 H	4318,00

P	12,7
H ₁	2,29
H	4,4

XH	
Code	Pitch length (mm)
507 XH	1289,00
534 XH	1356,36
560 XH	1422,40
630 XH	1600,20
700 XH	1778,00
770 XH	1955,80
840 XH	2133,60
980 XH	2489,20
1120 XH	2844,80
1260 XH	3200,40
1400 XH	3566,00
1540 XH	3911,60
1750 XH	4445,00

P	22,225
H ₁	6,22
H	11,4


XXH	
Code	Pitch length (mm)
700 XXH	1778,0
800 XXH	2032,0
900 XXH	2286,0
1000 XXH	2540,0
1200 XXH	3048,0
1400 XXH	3556,0
1600 XXH	4064,0
1800 XXH	4572,0

P	31,75
H ₁	9,53
H	15,3


DUNLOP™ TIMING BELTS

Rubber timing belts sleeves

XLDD		LDD		HDD		RBC5 DD		RBC8 DD		RBC14 DD	
Code	Pitch length (mm)	Code	Pitch length (mm)	Code	Pitch length (mm)	Code	Pitch length (mm)	Code	Pitch length (mm)	Code	Pitch length (mm)
DD 120 XL	304,80	DD 124 L	314,96	DD 240 H	609,60	600 RBC5 DD	600	600 RBC8 DD	600	966 RBC14 DD	966
DD 130 XL	330,20	DD 135 L	342,90	DD 270 H	685,80	610 RBC5 DD	610	608 RBC8 DD	608	994 RBC14 DD	994
DD 140 XL	355,60	DD 150 L	381,00	DD 300 H	762,00	615 RBC5 DD	615	632 RBC8 DD	632	1092 RBC14 DD	1092
DD 146 XL	370,84	DD 173 L	439,42	DD 330 H	838,20	635 RBC5 DD	635	640 RBC8 DD	640	1106 RBC14 DD	1106
DD 150 XL	381,00	DD 187 L	474,98	DD 360 H	914,40	640 RBC5 DD	640	680 RBC8 DD	680	1190 RBC14 DD	1190
DD 156 XL	396,24	DD 202 L	513,08	DD 390 H	990,60	670 RBC5 DD	670	720 RBC8 DD	720	1260 RBC14 DD	1260
DD 160 XL	406,40	DD 210 L	533,40	DD 420 H	1066,80	675 RBC5 DD	675	800 RBC8 DD	800	1288 RBC14 DD	1288
DD 170 XL	431,80	DD 225 L	571,50	DD 450 H	1143,00	700 RBC5 DD	700	840 RBC8 DD	840	1344 RBC14 DD	1344
DD 176 XL	447,04	DD 240 L	609,60	DD 480 H	1219,20	705 RBC5 DD	705	880 RBC8 DD	880	1400 RBC14 DD	1400
DD 180 XL	457,20	DD 255 L	647,70	DD 510 H	1295,40	710 RBC5 DD	710	896 RBC8 DD	896	1442 RBC14 DD	1442
DD 182 XL	462,28	DD 270 L	685,80	DD 540 H	1371,60	725 RBC5 DD	725	920 RBC8 DD	920	1568 RBC14 DD	1568
DD 188 XL	477,52	DD 285 L	723,90	DD 570 H	1447,80	740 RBC5 DD	740	960 RBC8 DD	960	1610 RBC14 DD	1610
DD 190 XL	482,60	DD 300 L	762,00	DD 600 H	1524,00	750 RBC5 DD	750	1000 RBC8 DD	1000	1750 RBC14 DD	1750
DD 198 XL	502,92	DD 322 L	817,88	DD 630 H	1600,20	755 RBC5 DD	755	1040 RBC8 DD	1040	1764 RBC14 DD	1764
DD 200 XL	508,00	DD 334 L	848,36	DD 660 H	1676,40	800 RBC5 DD	800	1080 RBC8 DD	1080	1778 RBC14 DD	1778
DD 202 XL	513,08	DD 345 L	876,30	DD 670 H	1701,80	835 RBC5 DD	835	1120 RBC8 DD	1120	1848 RBC14 DD	1848
DD 210 XL	533,40	DD 367 L	932,18	DD 700 H	1778,00	850 RBC5 DD	850	1200 RBC8 DD	1200	1890 RBC14 DD	1890
DD 212 XL	538,48	DD 390 L	990,60	DD 725 H	1841,50	890 RBC5 DD	890	1224 RBC8 DD	1224	1904 RBC14 DD	1904
DD 214 XL	543,56	DD 405 L	1028,70	DD 750 H	1905,00	900 RBC5 DD	900	1280 RBC8 DD	1280	1960 RBC14 DD	1960
DD 220 XL	558,80	DD 412 L	1046,48	DD 800 H	2032,00	935 RBC5 DD	935	1352 RBC8 DD	1352	2100 RBC14 DD	2100
DD 228 XL	579,12	DD 420 L	1066,80	DD 850 H	2159,00	940 RBC5 DD	940	1424 RBC8 DD	1424	2240 RBC14 DD	2240
DD 230 XL	584,20	DD 450 L	1143,00	DD 900 H	2286,00	950 RBC5 DD	950	1440 RBC8 DD	1440	2310 RBC14 DD	2310
DD 234 XL	594,36	DD 480 L	1219,20	DD 1000 H	2540,00	980 RBC5 DD	980	1464 RBC8 DD	1464	2380 RBC14 DD	2380
DD 240 XL	609,60	DD 510 L	1295,40	DD 1100 H	2794,00	1000 RBC5 DD	1000	1600 RBC8 DD	1600	2450 RBC14 DD	2450
DD 250 XL	635,00	DD 540 L	1371,60	DD 1120 H	2844,80	1025 RBC5 DD	1025	1680 RBC8 DD	1680	2590 RBC14 DD	2590
DD 260 XL	660,40	DD 600 L	1524,00	DD 1140 H	2895,60	1050 RBC5 DD	1050	1760 RBC8 DD	1760	2660 RBC14 DD	2660
DD 270 XL	685,80	DD 728 L	1849,12	DD 1150 H	2921,00	1100 RBC5 DD	1100	1800 RBC8 DD	1800	2800 RBC14 DD	2800
DD 276 XL	701,04	DD 817 L	2075,18	DD 1250 H	3175,00	1125 RBC5 DD	1125	2000 RBC8 DD	2000	2968 RBC14 DD	2968
DD 290 XL	736,60			DD 1400 H	3556,00	1135 RBC5 DD	1135	2200 RBC8 DD	2200	3150 RBC14 DD	3150
DD 310 XL	787,40			DD 1645 H	4178,30	1195 RBC5 DD	1195	2272 RBC8 DD	2272	3360 RBC14 DD	3360
DD 316 XL	802,64	P	9,525	DD 1700 H	4318,00	1200 RBC5 DD	1200	2400 RBC8 DD	2400	3500 RBC14 DD	3500
DD 320 XL	812,80	H ₁	1,91			1240 RBC5 DD	1240	2520 RBC8 DD	2520	3850 RBC14 DD	3850
DD 330 XL	838,20	H	4,6	P	12,7	1270 RBC5 DD	1270	2600 RBC8 DD	2600	3920 RBC14 DD	3920
DD 344 XL	873,76			H ₁	2,29	1420 RBC5 DD	1420	2800 RBC8 DD	2800	4326 RBC14 DD	4326
DD 352 XL	894,08			H	5,9	1500 RBC5 DD	1500	3048 RBC8 DD	3048	4578 RBC14 DD	4578
DD 364 XL	924,56					1595 RBC5 DD	1595	3280 RBC8 DD	3280	4956 RBC14 DD	4956
DD 380 XL	965,20					1605 RBC5 DD	1605	3600 RBC8 DD	3600		
DD 384 XL	975,36					1690 RBC5 DD	1690	4400 RBC8 DD	4400		
DD 388 XL	985,52					1790 RBC5 DD	1790			P	14
DD 390 XL	990,60					1800 RBC5 DD	1800			H ₁	6
DD 392 XL	995,68					1870 RBC5 DD	1870			H	13,7
DD 434 XL	1102,36					1895 RBC5 DD	1895				
DD 460 XL	1168,40					1945 RBC5 DD	1945				
DD 530 XL	1346,20					2000 RBC5 DD	2000				
DD 600 XL	1524,00					2250 RBC5 DD	2250				
DD 710 XL	1803,40					2525 RBC5 DD	2525				
P	5,08										
H ₁	1,27										
H	3,05										
P	5										
H ₁	2										
H	5,2										

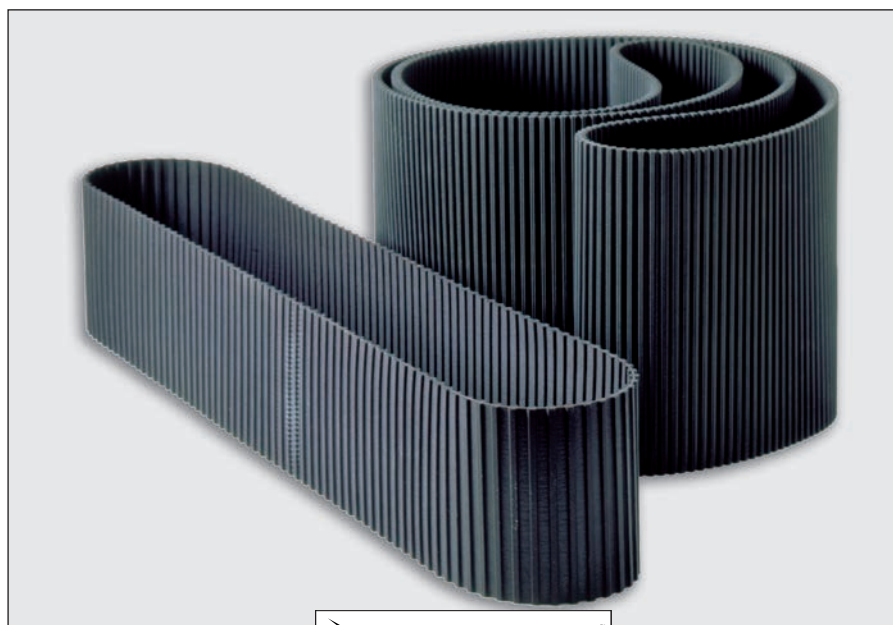

**DUNLOP™ OPEN-END
RUBBER TIMING BELTS ROLLS**

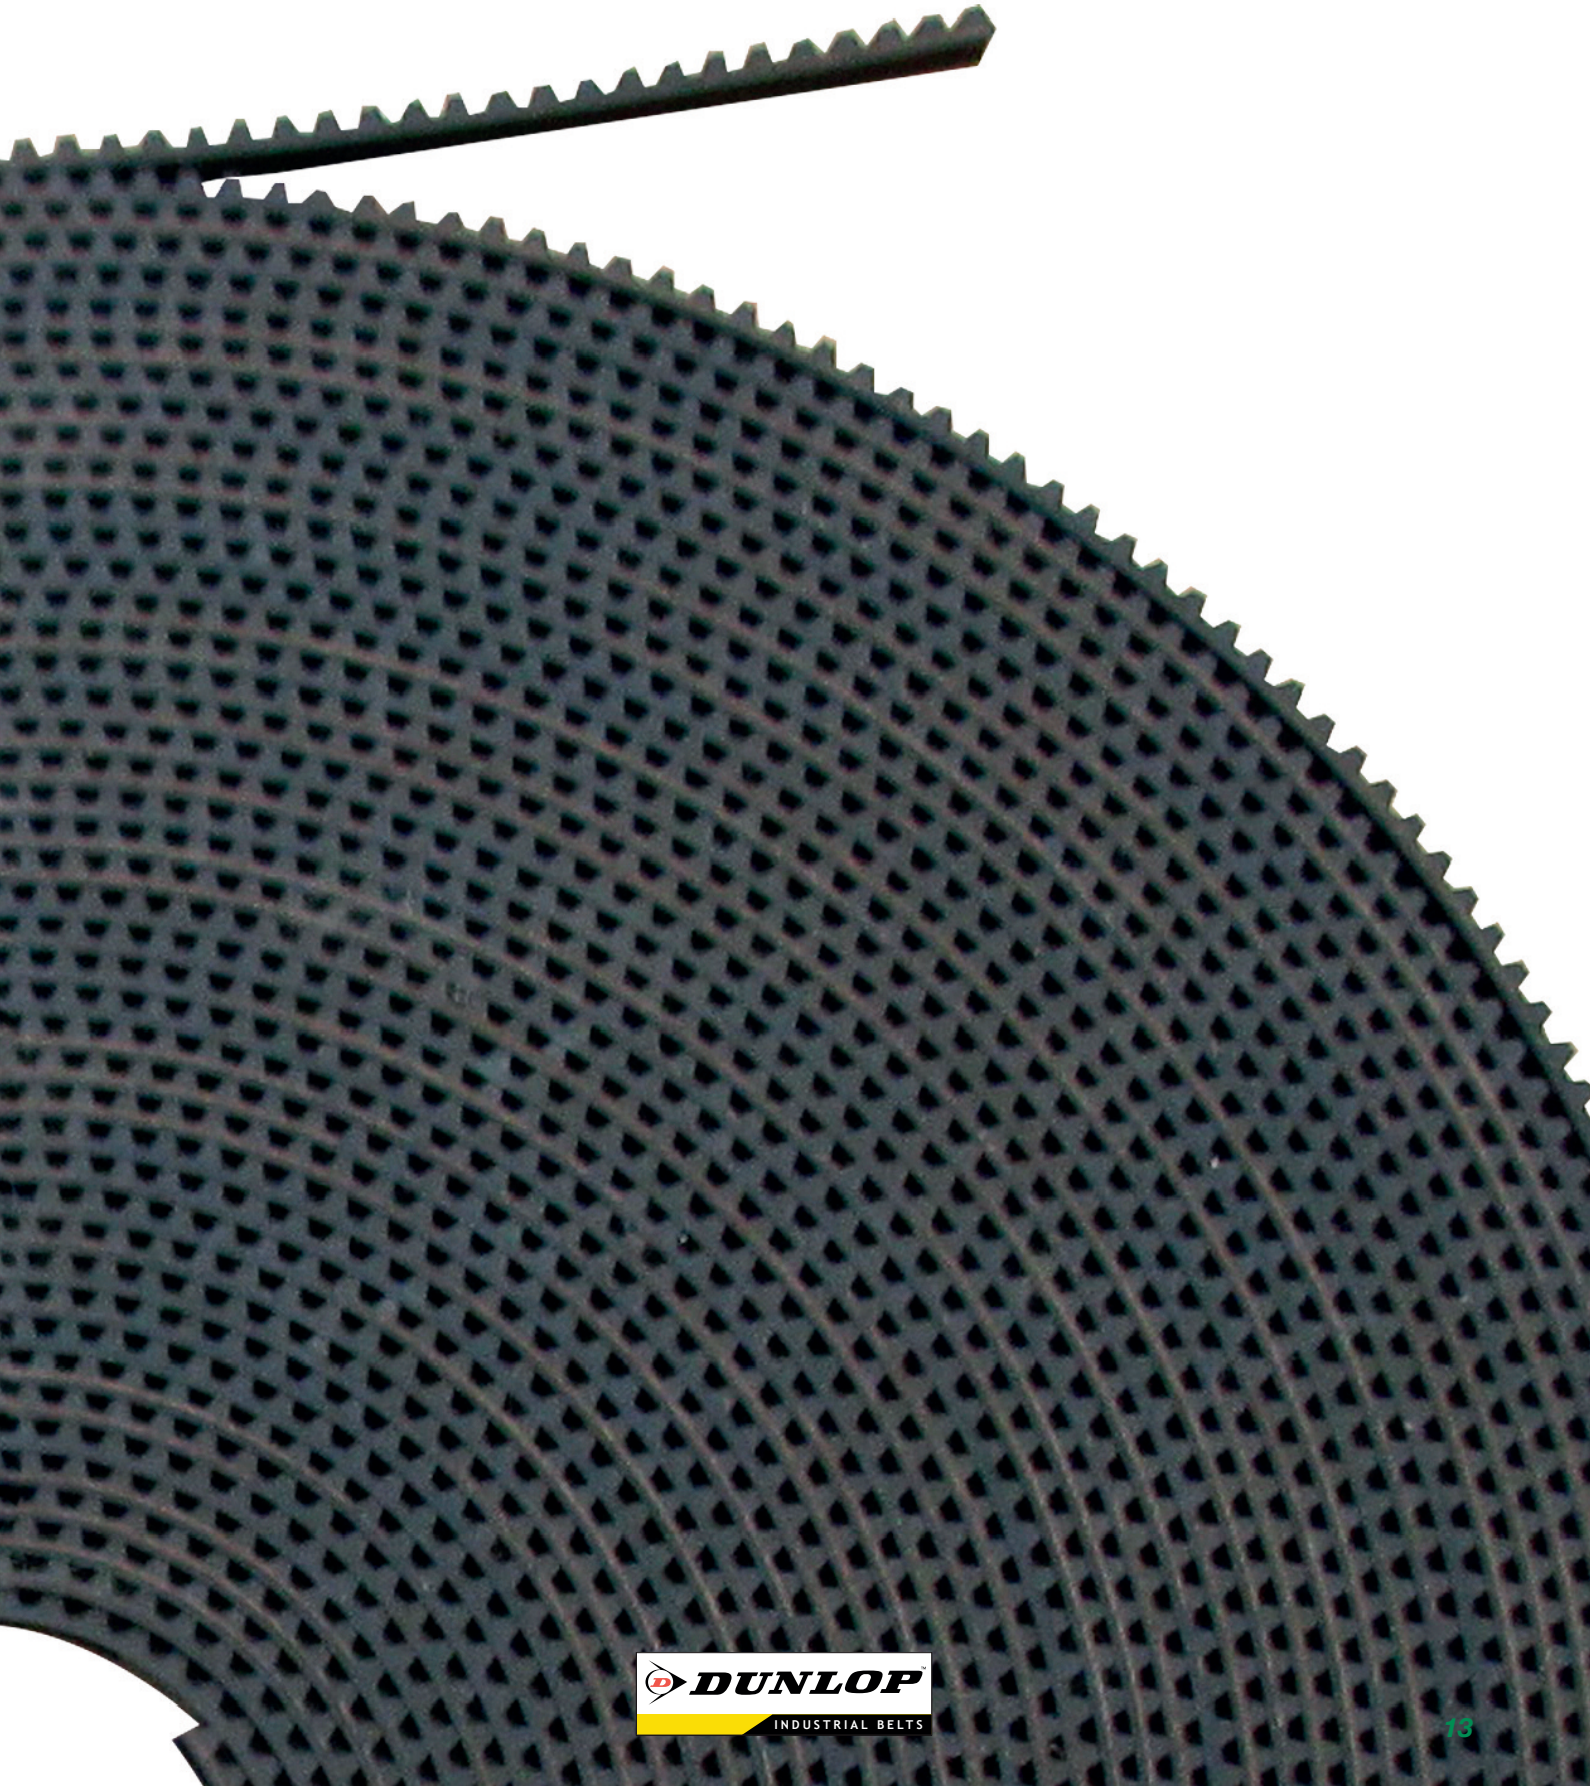

DUNLOP™ OPEN-END

Rubber timing belts rolls



DUNLOP™ OPEN-END RUBBER TIMING BELTS


Specially suitable for linear drives, accurate positioning and reversible drives.

A high load capacity, no maintenance cost and very low noise level, make this belt a perfect alternative to chain or cable reverse drives.


DUNLOP™ Open-end rubber belts, produced both in straight and spiral cut, are available in the following profiles, pitches and constructions:

- DUNLOP™: MXL; XL; L; H
- DUNLOP™ RBC: RBC3; RBC5; RBC8
- DUNLOP™ RBC BLU: BLU5; BLU8
- DUNLOP™ STD: STD8


MXL - XL - L - H




RBC3 - RBC5 - RBC8

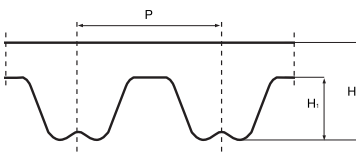

BLU5 - BLU8

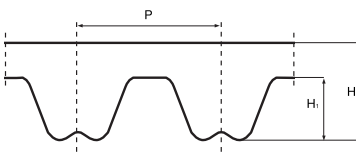

STD8



	MXL	XL	L	H
	Std. width (inches)	Std. width (inches)	Std. width (inches)	Std. width (inches)
	0,25 0,31 0,37	0,25 0,31 0,37	0,50 0,75 1,00	0,50 0,75 1,00 1,50 2,00 3,00
P	2,032	5,08	9,525	12,7
H	1,14	2,4	3,6	4,4
H _i	0,51	1,27	1,91	2,29

	RBC3	RBC5	RBC8
	Std. width (mm)	Std. width (mm)	Std. width (mm)
	9 12 15	9 12 15 20 25 30	10 15 20 25 30 50 85
P	3	5	8
H	2,4	3,8	5,4
H _i	1,15	2	3,2

	BLU5	BLU8	STD8
	Std. width (mm)	Std. width (mm)	Std. width (mm)
	15 25 30	10 15 20 30 50 85	10 20 30 50 85
P	5	8	8
H	3,8	5,4	5,3
H _i	2	3,2	3,05

DUNLOP™ V-BELTS

Rubber V-belts



Classical V-belts



Wedge belts



Wedge belts - American standard




Double V-belts



Extra Duty V-belts




Classical Raw-Edge Cogged

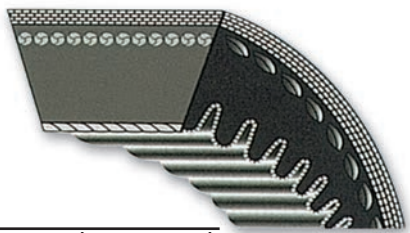

American Standard Raw Edge Cogged



Wedge Raw-Edge cogged

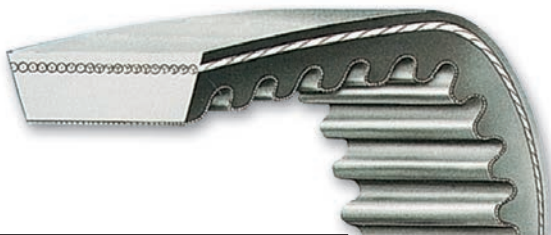


Variable speed belts



Banded V-belts

DUNLOP™ V-BELTS

Rubber V-belts

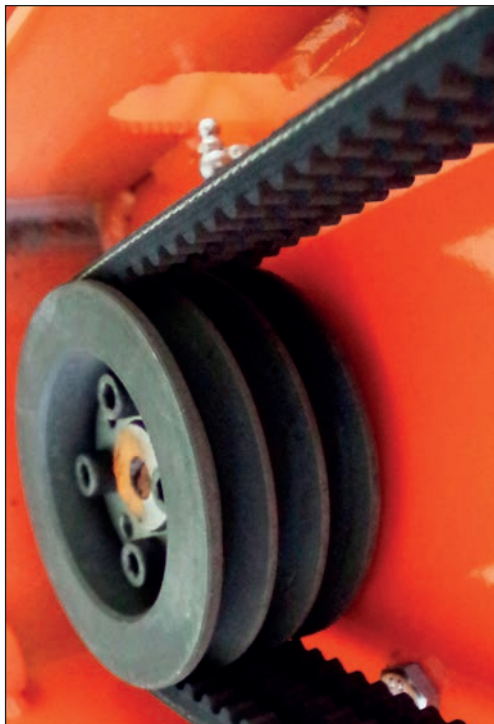

DUNLOP™ V-BELTS are manufactured in polybutadiene compound. High variety of belt sizes available permits the application of **DUNLOP™ V-BELTS** on all types of industrial equipments. Applied technology allows to reach so good dimensional precision in V-BELTS to make them suitable for multiple transmissions. This dimensional stability continues also during belt use.

DUNLOP™ V-BELTS offers the following features:

MECHANICAL features

- Smooth starting and running
- Wide range of driven speeds, using standard electric motors
- Low maintenance
- High efficient
- No need for lubrication
- Extremely wide horsepower ranges
- Dampen vibration between driver and driven pulleys
- Silent operations
- Long service life
- Easy installation
- Reduction in drive dimension

CHEMICAL features

- Working temperature range -30 °C to +70 °C
- Resistance to oil and heat
- Antistatic properties

Special construction are available on request.



EXTRA DUTY V-BELTS

The EDV belt has been created for drives with small pulley diameters and high temperature peaks, combined with a high grade of moisture and humidity.


It withstands the harshest environmental requirements, such as oil and grease contaminated drives of transmissions where grits may interfere between pulleys and belt.

Thanks to its characteristics, the EDV perfectly matches the requirements of clutching drives as the aramid cord protect the belt against shock loads while maintaining its length constant.

* Raw edge construction / cogged mould

DUNLOP™ V-BELTS

Rubber V-belts




C profile

Code	Internal length (mm)
C 33 3/4	858
C 37 1/2	950
C 39 3/4	1013
C 43	1090
C 45	1150
C 46	1168
C 48	1220
C 49	1250
C 51	1295
C 52	1320
C 53	1350
C 54	1372
C 55	1400
C 56	1425
C 59	1500
C 60	1524
C 61	1560
C 62 1/4	1583
C 63	1600
C 65	1650
C 67	1700
C 68	1727
C 70	1778
C 71	1798
C 75	1900
C 78	1978
C 80	2032
C 81	2057
C 83	2108
C 84	2134
C 85	2159
C 86	2184
C 87	2208
C 88	2235
C 89	2261
C 90	2286
C 93	2360
C 94	2388
C 95	2413
C 96	2438
C 97	2462
C 97 1/2	2477
C 98	2500
C 99	2525
C 100	2540
C 101	2560
C 102	2591
C 104	2642
C 105	2667
C 106	2692
C 108	2750
C 110	2800
C 111	2818
C 112	2845
C 112 1/2	2858
C 114	2888
C 115	2921
C 116	2950
C 117	2965
C 118	3000
C 120	3048
C 124	3150
C 126	3200
C 128	3250
C 130	3302
C 132	3350
C 134	3404
C 136	3456
C 138	3498
C 140	3550
C 142	3607
C 144	3658
C 147	3733
C 148	3750
C 150	3808
C 153	3902
C 158	4000
C 160	4064
C 161 1/2	4100
C 162	4115
C 165	4193
C 166	4216
C 168	4267
C 173	4394
C 177	4500


C profile

Code	Internal length (mm)
C 180	4572
C 187	4750
C 195	4953
C 197	5000
C 204	5182
C 208	5300
C 210	5334
C 216	5486
C 220	5550
C 222	5600
C 225	5678
C 228	5753
C 236	6000
C 238	6045
C 240	6062
C 248	6263
C 250	6300
C 255	6438
C 265	6700
C 270	6822
C 276	6973
C 280	7100
C 285	7203
C 297	7500
C 300	7582
C 303	7650
C 314	7976
C 316	8000
C 330	8382
C 336	8500
C 345	8723
C 360	9107
C 394	10000
C 420	10632
C 424	10733




D profile

Code	Internal length (mm)
D 98	2500
D 104	2650
D 110	2800
D 118	3000
D 120	3048
D 124	3150
D 128	3251
D 136	3454
D 137	3475
D 140	3550
D 144	3658
D 154	3914
D 158	4013
D 162	4115
D 170	4310
D 173	4394
D 177	4500
D 180	4572
D 187	4750
D 195	4953
D 197	5000
D 204	5182
D 205	5209
D 207	5259
D 210	5334
D 223	5600
D 225	5659
D 236	5940
D 238	6000
D 240	6039
D 248	6244
D 250	6294
D 255	6424
D 266	6700
D 270	6804
D 282	7100
D 285	7184
D 298	7500
D 300	7565
D 314	7924
D 316	7974
D 326	8224
D 330	8329
D 345	8709
D 360	9090
D 390	9849
D 394	10000
D 420	10624
D 441	11200
D 480	12139
D 510	12897
D 540	13659
D 600	15184




E profile

Code	Internal length (mm)
E 180	4575
E 197	5000
E 210	5335
E 220	5600
E 226	5660
E 240	6015
E 248	6220
E 255	6400
E 270	6780
E 280	7100
E 285	7160
E 295	7500
E 300	7540
E 316	7950
E 330	8305
E 345	8685
E 354	9000
E 360	9065
E 394	9930
E 420	10600
E 441	11200
E 480	12115
E 492	12500
E 540	13635
E 600	15160



25 profile

Code	Internal length (mm)
25	1800
25	1900
25	1950
25	2000
25	2050
25	2120
25	2200
25	2240
25	2325
25	2360
25	2450
25	2500
25	2650
25	2700
25	2800
25	2950
25	3000
25	3150
25	3300
25	3350
25	3550
25	3750
25	3950
25	4000
25	4250
25	4450
25	4500
25	4750
25	5000
25	5300
25	5600
25	5700
25	6000
25	6300
25	6500
25	6700
25	7100
25	7500
25	8000
25	8500
25	9000
25	9500
25	10000





20 profile

Code	Internal length (mm)
20	1800
20	1875
20	1900
20	1925
20	1950
20	2000
20	2050
20	2120
20	2200
20	2240
20	2360
20	2500
20	2600
20	2650
20	2800
20	3000
20	3150
20	3250
20	3350
20	3450
20	3550
20	3650
20	3750
20	4000
20	4250
20	4500
20	4750
20	5000
20	5300
20	5600
20	6000

* Raw edge construction / cogged mould

DUNLOP™ V-BELTS

Wedge V-belts

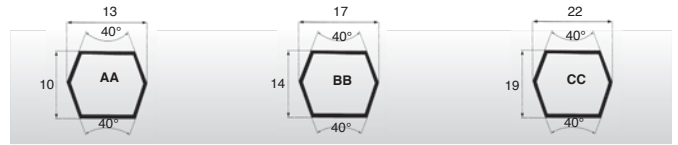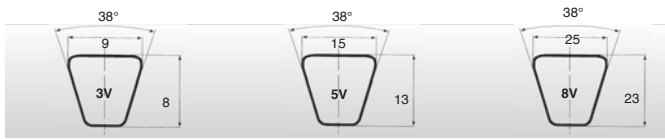




3V profile		5V profile		8V profile		AA profile		BB profile		CC profile	
Code	External length (mm)	Code	External length (mm)	Code	External length (mm)	Code	Effective length (mm)	Code	Effective length (mm)	Code	Effective length (mm)
3V 250	635	5V 500	1270	8V 1000	2540	AA 51	1350	BB 50	1345	CC 75	2015
3V 265	675	5V 530	1345	8V 1060	2690	AA 60	1580	BB 60	1600	CC 81	2165
3V 280	710	5V 560	1420	8V 1120	2840	AA 61	1600	BB 75	1980	CC 85	2265
3V 300	760	5V 600	1525	8V 1180	3000	AA 68	1780	BB 81	2130	CC 86	2290
3V 315	800	5V 630	1600	8V 1250	3180	AA 69	1805	BB 84	2210	CC 90	2395
3V 335	850	5V 670	1700	8V 1320	3350	AA 71	1855	BB 85	2235	CC 96	2545
3V 355	900	5V 710	1800	8V 1400	3550	AA 75	1955	BB 90	2360	CC 105	2775
3V 375	955	5V 750	1900	8V 1500	3810	AA 77	2010	BB 97	2540	CC 112	2955
3V 400	1015	5V 800	2030	8V 1600	4060	AA 80	2085	BB 105	2740	CC 120	3155
3V 425	1080	5V 850	2160	8V 1700	4320	AA 81	2110	BB 112	2920	CC 128	3360
3V 450	1145	5V 900	2290	8V 1800	4570	AA 85	2210	BB 118	3070	CC 144	3765
3V 475	1205	5V 950	2410	8V 1900	4830	AA 90	2340	BB 120	3125	CC 153	4000
3V 500	1270	5V 1000	2540	8V 2000	5080	AA 91	2365	BB 121	3150	CC 158	4120
3V 530	1345	5V 1060	2690	8V 2120	5380	AA 95	2465	BB 128	3325	CC 162	4225
3V 560	1420	5V 1120	2840	8V 2240	5690	AA 96	2490	BB 144	3735	CC 173	4500
3V 600	1525	5V 1180	3000	8V 2360	6000	AA 105	2720	BB 154	4000	CC 180	4680
3V 630	1600	5V 1250	3180	8V 2500	6350	AA 108	2800	BB 155	4010	CC 193	5000
3V 670	1700	5V 1320	3350	8V 2650	6730	AA 112	2895	BB 158	4090	CC 195	5060
3V 710	1805	5V 1400	3550	8V 2800	7100	AA 116	3000	BB 173	4470	CC 210	5440
3V 750	1905	5V 1500	3810	8V 3000	7620	AA 120	3100	BB 174	4495	CC 234	6000
3V 800	2030	5V 1600	4060	8V 3150	8000	AA 128	3305	BB 180	4645	CC 240	6155
3V 850	2160	5V 1700	4320	8V 3350	8500			BB 184	4750	CC 270	6915
3V 900	2285	5V 1800	4570	8V 3550	9000			BB 190	4900	CC 300	7675
3V 950	2415	5V 1900	4830	8V 3750	9500			BB 195	5030	CC 313	8000
3V 1000	2540	5V 2000	5080	8V 4000	10160			BB 210	5410	CC 330	8440
3V 1060	2690	5V 2120	5380	8V 4250	10800			BB 240	6135	CC 360	9200
3V 1120	2845	5V 2240	5690	8V 4500	11430			BB 270	6895	CC 390	9965
3V 1180	2995	5V 2360	6000	8V 4750	12060			BB 300	7655	CC 420	10725
3V 1250	3175	5V 2500	6350	8V 5000	12700						
3V 1320	3355	5V 2650	6730								
3V 1400	3555	5V 2800	7100								
		5V 3000	7620								
		5V 3150	8000								
		5V 3350	8500								
		5V 3550	9000								

* Raw edge construction / cogged mould



DUNLOP™ V-BELTS

Extra duty V-belts



EDV-38 profile	
Code	External length (mm)
EDV 38/150	381
EDV 38/160	406
EDV 38/170	432
EDV 38/180	457
EDV 38/190	483
EDV 38/200	508
EDV 38/210	533
EDV 38/220	559
EDV 38/230	584
EDV 38/240	610
EDV 38/250	635
EDV 38/260	660
EDV 38/270	686
EDV 38/280	711
EDV 38/290	737
EDV 38/300	762
EDV 38/310	787
EDV 38/320	813
EDV 38/330	838
EDV 38/340	864
EDV 38/350	889
EDV 38/360	914
EDV 38/370	940
EDV 38/380	965
EDV 38/390	991
EDV 38/400	1016
EDV 38/410	1041
EDV 38/420	1067
EDV 38/430	1092
EDV 38/440	1118
EDV 38/450	1143
EDV 38/460	1168
EDV 38/470	1194
EDV 38/480	1219
EDV 38/490	1245
EDV 38/500	1270
EDV 38/510	1295
EDV 38/520	1321
EDV 38/530	1346
EDV 38/540	1372
EDV 38/550	1397
EDV 38/560	1422
EDV 38/570	1448
EDV 38/580	1473
EDV 38/590	1499
EDV 38/600	1524
EDV 38/610	1549
EDV 38/620	1575
EDV 38/630	1600
EDV 38/690	1753
EDV 38/710	1803
EDV 38/740	1880
EDV 38/750	1905

EDV-48 profile	
Code	External length (mm)
EDV 48/170	432
EDV 48/180	457
EDV 48/190	483
EDV 48/200	508
EDV 48/210	533
EDV 48/220	559
EDV 48/230	584
EDV 48/240	610
EDV 48/250	635
EDV 48/260	660
EDV 48/270	686
EDV 48/280	711
EDV 48/290	737
EDV 48/300	762
EDV 48/310	787
EDV 48/320	813
EDV 48/330	838
EDV 48/340	864
EDV 48/350	889
EDV 48/360	914
EDV 48/370	940
EDV 48/380	965
EDV 48/390	991
EDV 48/400	1016
EDV 48/410	1041
EDV 48/420	1067
EDV 48/430	1092
EDV 48/440	1118
EDV 48/450	1143
EDV 48/460	1168
EDV 48/470	1194
EDV 48/480	1219
EDV 48/490	1245
EDV 48/500	1270
EDV 48/510	1295
EDV 48/520	1321
EDV 48/530	1346
EDV 48/540	1372
EDV 48/550	1397
EDV 48/560	1422
EDV 48/570	1448
EDV 48/580	1473
EDV 48/590	1499
EDV 48/600	1524
EDV 48/610	1549
EDV 48/620	1575
EDV 48/630	1600
EDV 48/640	1626
EDV 48/650	1651
EDV 48/660	1676
EDV 48/670	1702
EDV 48/680	1727
EDV 48/690	1753
EDV 48/700	1778
EDV 48/710	1803
EDV 48/720	1829
EDV 48/730	1854
EDV 48/740	1880
EDV 48/750	1905
EDV 48/760	1930
EDV 48/770	1956
EDV 48/780	1981
EDV 48/790	2007
EDV 48/800	2032
EDV 48/810	2057
EDV 48/820	2083
EDV 48/830	2108
EDV 48/840	2134
EDV 48/850	2159
EDV 48/860	2184
EDV 48/870	2210
EDV 48/880	2235
EDV 48/890	2261
EDV 48/900	2286
EDV 48/910	2311

EDV-48 profile	
Code	External length (mm)
EDV 48/920	2337
EDV 48/930	2362
EDV 48/940	2388
EDV 48/950	2413
EDV 48/960	2438
EDV 48/970	2464
EDV 48/980	2489
EDV 48/990	2515
EDV 48/1000	2540
EDV 48/1050	2667
EDV 48/1070	2718
EDV 48/1140	2896
EDV 48/1170	2972

EDV-58 profile	
Code	External length (mm)
EDV 58/230	584
EDV 58/240	610
EDV 58/250	635
EDV 58/260	660
EDV 58/270	686
EDV 58/280	711
EDV 58/290	737
EDV 58/300	762
EDV 58/310	787
EDV 58/320	813
EDV 58/330	838
EDV 58/340	864
EDV 58/350	889
EDV 58/360	914
EDV 58/370	940
EDV 58/380	965
EDV 58/390	991
EDV 58/400	1016
EDV 58/410	1041
EDV 58/420	1067
EDV 58/430	1092
EDV 58/440	1118
EDV 58/450	1143
EDV 58/460	1168
EDV 58/470	1194
EDV 58/480	1219
EDV 58/490	1245
EDV 58/500	1270
EDV 58/510	1295
EDV 58/520	1321
EDV 58/530	1346
EDV 58/540	1372
EDV 58/550	1397
EDV 58/560	1422
EDV 58/570	1448
EDV 58/580	1473
EDV 58/590	1499
EDV 58/600	1524
EDV 58/610	1549
EDV 58/620	1575
EDV 58/630	1600
EDV 58/640	1626
EDV 58/650	1651
EDV 58/660	1676
EDV 58/670	1702
EDV 58/680	1727
EDV 58/690	1753
EDV 58/700	1778
EDV 58/710	1803
EDV 58/720	1829
EDV 58/730	1854
EDV 58/740	1880
EDV 58/750	1905
EDV 58/760	1930
EDV 58/770	1956
EDV 58/780	1981
EDV 58/790	2007
EDV 58/800	2032
EDV 58/810	2057
EDV 58/820	2083
EDV 58/830	2108
EDV 58/840	2134
EDV 58/850	2159
EDV 58/860	2184
EDV 58/870	2210
EDV 58/880	2235
EDV 58/890	2261
EDV 58/900	2286
EDV 58/910	2311
EDV 58/920	2337
EDV 58/930	2362
EDV 58/940	2388
EDV 58/950	2413
EDV 58/960	2438
EDV 58/970	2464





EDV-58 profile	
Code	External length (mm)
EDV 58/980	2489
EDV 58/990	2515
EDV 58/1000	2540
EDV 58/1030	2616
EDV 58/1080	2743

* Raw edge construction / cogged mould



DUNLOP™ V-BELTS

Raw edge cogged V-belts



XPZ profile

Code	External length (mm)
XPZ 512	525
XPZ 562	575
XPZ 587	600
XPZ 612	625
XPZ 630	643
XPZ 637	650
XPZ 662	675
XPZ 670	683
XPZ 687	700
XPZ 710	723
XPZ 722	735
XPZ 737	750
XPZ 750	763
XPZ 762	775
XPZ 787	800
XPZ 800	813
XPZ 812	825
XPZ 837	850
XPZ 850	863
XPZ 862	875
XPZ 875	888
XPZ 887	900
XPZ 900	913
XPZ 912	925
XPZ 925	938
XPZ 937	950
XPZ 950	963
XPZ 962	975
XPZ 987	1000
XPZ 1000	1013
XPZ 1012	1025
XPZ 1037	1050
XPZ 1047	1060
XPZ 1060	1073
XPZ 1062	1075
XPZ 1077	1090
XPZ 1087	1100
XPZ 1112	1125
XPZ 1120	1133
XPZ 1137	1150
XPZ 1162	1175
XPZ 1180	1193
XPZ 1187	1200
XPZ 1202	1215
XPZ 1212	1225
XPZ 1237	1250
XPZ 1250	1263
XPZ 1262	1275
XPZ 1270	1283
XPZ 1287	1300
XPZ 1312	1325
XPZ 1320	1333
XPZ 1337	1350
XPZ 1362	1375
XPZ 1387	1400
XPZ 1400	1413
XPZ 1412	1425
XPZ 1420	1433
XPZ 1437	1450
XPZ 1462	1475
XPZ 1487	1500
XPZ 1500	1513
XPZ 1512	1525
XPZ 1520	1533
XPZ 1537	1550
XPZ 1587	1600
XPZ 1600	1613
XPZ 1612	1625
XPZ 1662	1675
XPZ 1700	1713
XPZ 1762	1775
XPZ 1800	1813
XPZ 1900	1913
XPZ 2000	2013
XPZ 2030	2043

XPZ profile

Code	External length (mm)
XPZ 2120	2133
XPZ 2160	2173
XPZ 2240	2253
XPZ 2280	2293
XPZ 2360	2373
XPZ 2410	2423
XPZ 2500	2513
XPZ 2540	2553
XPZ 2650	2663
XPZ 2690	2703
XPZ 2800	2813
XPZ 2840	2853
XPZ 3000	3013
XPZ 3150	3163
XPZ 3170	3183
XPZ 3350	3363
XPZ 3550	3563

XPA profile

Code	External length (mm)
XPA 667	685
XPA 682	700
XPA 732	750
XPA 757	775
XPA 782	800
XPA 800	818
XPA 807	825
XPA 832	850
XPA 850	868
XPA 857	875
XPA 882	900
XPA 900	918
XPA 907	925
XPA 932	950
XPA 950	968
XPA 957	975
XPA 969	987
XPA 982	1000
XPA 1000	1018
XPA 1007	1025
XPA 1032	1050
XPA 1057	1075
XPA 1060	1078
XPA 1082	1100
XPA 1107	1125
XPA 1120	1138
XPA 1132	1150
XPA 1150	1168
XPA 1157	1175
XPA 1180	1198
XPA 1182	1200
XPA 1207	1225
XPA 1232	1250
XPA 1250	1268
XPA 1257	1275
XPA 1272	1290
XPA 1282	1300
XPA 1307	1325
XPA 1320	1338
XPA 1332	1350
XPA 1357	1375
XPA 1382	1400
XPA 1400	1418
XPA 1407	1425
XPA 1420	1438
XPA 1432	1450
XPA 1457	1475
XPA 1482	1500
XPA 1500	1518
XPA 1507	1525
XPA 1532	1550
XPA 1557	1575
XPA 1582	1600
XPA 1600	1618
XPA 1607	1625
XPA 1632	1650
XPA 1650	1668
XPA 1682	1700
XPA 1700	1718
XPA 1732	1750
XPA 1757	1775
XPA 1782	1800
XPA 1800	1818
XPA 1832	1850
XPA 1850	1868
XPA 1900	1918
XPA 1932	1950
XPA 1957	1975
XPA 1982	2000
XPA 2000	2018
XPA 2032	2050
XPA 2057	2075
XPA 2082	2100
XPA 2120	2138
XPA 2160	2178

XPA profile

Code	External length (mm)
XPA 2182	2200
XPA 2240	2258
XPA 2282	2300
XPA 2300	2318
XPA 2360	2378
XPA 2432	2450
XPA 2482	2500
XPA 2500	2518
XPA 2532	2550
XPA 2582	2600
XPA 2607	2625
XPA 2632	2650
XPA 2650	2668
XPA 2682	2700
XPA 2732	2750
XPA 2782	2800
XPA 2800	2818
XPA 3000	3018
XPA 3150	3168
XPA 3350	3368
XPA 3550	3568
XPA 3750	3768
XPA 4000	4018
XPA 4250	4268
XPA 4500	4518

XPB profile

Code	External length (mm)
XPB 1250	1272
XPB 1260	1282
XPB 1320	1342
XPB 1340	1362
XPB 1400	1422
XPB 1410	1432
XPB 1500	1522
XPB 1510	1532
XPB 1590	1612
XPB 1600	1622
XPB 1650	1672
XPB 1690	1712
XPB 1700	1722
XPB 1800	1822
XPB 1900	1922
XPB 2000	2022
XPB 2020	2042
XPB 2120	2142
XPB 2150	2172
XPB 2240	2262
XPB 2280	2302
XPB 2360	2382
XPB 2410	2432
XPB 2500	2522
XPB 2530	2552
XPB 2650	2672
XPB 2680	2702
XPB 2800	2822
XPB 2840	2862
XPB 2900	2922
XPB 2990	3012
XPB 3000	3022
XPB 3150	3172
XPB 3170	3192
XPB 3340	3362
XPB 3350	3372
XPB 3550	3572
XPB 3750	3772
XPB 3800	3822
XPB 4000	4022
XPB 4060	4082
XPB 4250	4272
XPB 4500	4522
XPB 4750	4772
XPB 5000	5022

XPC profile




Code	External length (mm)
XPC 2000	2030
XPC 2120	2150
XPC 2240	2270
XPC 2360	2390
XPC 2500	2530
XPC 2650	2680
XPC 2800	2830
XPC 3000	3030
XPC 3150	3180
XPC 3350	3380
XPC 3550	3580
XPC 3750	3780
XPC 4000	4030
XPC 4250	4280
XPC 4500	4530
XPC 4750	4780
XPC 5000	5030

* Raw edge construction / cogged mould



DUNLOP™ V-BELTS

Raw edge cogged V-belts



AX profile		AX profile	
Code	External length (mm)	Code	External length (mm)
AX 21	585	AX 136	3510
AX 22	610	AX 144	3710
AX 23	635	AX 158	4070
AX 24	665	AX 173	4450
AX 25	690	AX 180	4620
AX 26	710		
AX 27	750		
AX 28	765		
AX 29	800		
AX 30	815		
AX 31	850		
AX 32	865		
AX 33	900		
AX 34	915		
AX 35	950		
AX 36	965		
AX 37	1000		
AX 38	1020		
AX 39	1045		
AX 40	1075		
AX 41	1095		
AX 42	1120		
AX 43	1150		
AX 44	1170		
AX 45	1195		
AX 46	1230		
AX 47	1245		
AX 48	1270		
AX 49	1300		
AX 50	1325		
AX 51	1350		
AX 52	1375		
AX 53	1400		
AX 54	1425		
AX 55	1450		
AX 56	1475		
AX 57	1500		
AX 58	1525		
AX 59	1550		
AX 60	1585		
AX 61	1600		
AX 62	1630		
AX 63	1655		
AX 64	1680		
AX 65	1710		
AX 66	1730		
AX 67	1760		
AX 68	1790		
AX 69	1810		
AX 70	1830		
AX 71	1865		
AX 72	1890		
AX 73	1905		
AX 74	1935		
AX 75	1965		
AX 76	1985		
AX 77	2010		
AX 78	2030		
AX 79	2060		
AX 80	2080		
AX 81	2120		
AX 82	2140		
AX 83	2160		
AX 84	2190		
AX 85	2220		
AX 86	2240		
AX 87	2260		
AX 88	2290		
AX 89	2310		
AX 90	2350		
AX 91	2360		
AX 92	2390		
AX 93	2420		
AX 94	2440		
AX 95	2470		
AX 96	2500		
AX 97	2520		
AX 98	2540		
AX 100	2600		
AX 103	2670		
AX 105	2730		
AX 110	2850		
AX 112	2910		
AX 120	3110		
AX 128	3310		

BX profile		BX profile	
Code	External length (mm)	Code	External length (mm)
BX 28	785	BX 148	3830
BX 30	835	BX 150	3880
BX 32	885	BX 154	3990
BX 34	935	BX 158	4090
BX 35	960	BX 162	4200
BX 36	990	BX 173	4480
BX 38	1040	BX 180	4650
BX 40	1090	BX 191	4930
BX 41	1120	BX 195	5040
BX 42	1140		
BX 43	1165		
BX 44	1190		
BX 45	1215		
BX 46	1250		
BX 47	1265		
BX 48	1295		
BX 49	1320		
BX 50	1345		
BX 51	1370		
BX 52	1400		
BX 53	1420		
BX 54	1445		
BX 55	1470		
BX 56	1500		
BX 57	1520		
BX 58	1545		
BX 59	1570		
BX 60	1600		
BX 61	1625		
BX 62	1650		
BX 63	1675		
BX 64	1700		
BX 65	1725		
BX 66	1750		
BX 67	1775		
BX 68	1800		
BX 69	1825		
BX 70	1850		
BX 71	1875		
BX 72	1900		
BX 73	1930		
BX 74	1955		
BX 75	1980		
BX 76	2000		
BX 77	2030		
BX 78	2050		
BX 79	2080		
BX 80	2110		
BX 81	2130		
BX 82	2160		
BX 83	2180		
BX 84	2210		
BX 85	2240		
BX 86	2260		
BX 87	2280		
BX 88	2310		
BX 89	2330		
BX 90	2360		
BX 91	2390		
BX 92	2410		
BX 93	2440		
BX 94	2460		
BX 95	2500		
BX 96	2510		
BX 97	2540		
BX 98	2560		
BX 99	2590		
BX 100	2620		
BX 103	2690		
BX 105	2740		
BX 106	2770		
BX 108	2820		
BX 112	2920		
BX 113	2940		
BX 115	2990		
BX 116	3020		
BX 120	3130		
BX 123	3200		
BX 124	3220		
BX 126	3270		
BX 128	3330		
BX 133	3450		
BX 136	3530		
BX 140	3630		
BX 144	3740		




CX profile	
Code	External length (mm)
CX 51	1400
CX 55	1500
CX 60	1630
CX 68	1830
CX 72	1935
CX 75	2000
CX 78	2090
CX 81	2160
CX 85	2270
CX 90	2390
CX 96	2540
CX 100	2650
CX 101	2670
CX 105	2770
CX 109	2870
CX 111	2920
CX 112	2950
CX 115	3030
CX 120	3150
CX 128	3350
CX 136	3550
CX 144	3760
CX 148	3860
CX 150	3920
CX 158	4120
CX 162	4220
CX 173	4500
CX 180	4680

* Raw edge construction / cogged mould



DUNLOP™ V-BELTS

Raw edge cogged V-belts



3VX profile


Code	External length (mm)
3VX 250	630
3VX 265	670
3VX 280	710
3VX 300	760
3VX 315	800
3VX 335	850
3VX 355	900
3VX 375	950
3VX 400	1015
3VX 425	1080
3VX 450	1145
3VX 475	1205
3VX 500	1270
3VX 530	1345
3VX 560	1420
3VX 600	1525
3VX 630	1600
3VX 670	1700
3VX 710	1800
3VX 750	1900
3VX 800	2030
3VX 850	2160
3VX 900	2290
3VX 950	2410
3VX 1000	2540
3VX 1060	2690
3VX 1120	2840
3VX 1180	3000
3VX 1250	3180
3VX 1320	3350
3VX 1400	3550
3VX 1500	3810

5VX profile

Code	External length (mm)
5VX 450	1150
5VX 470	1190
5VX 490	1250
5VX 500	1270
5VX 510	1290
5VX 530	1345
5VX 540	1370
5VX 550	1400
5VX 560	1420
5VX 570	1450
5VX 580	1470
5VX 590	1500
5VX 600	1525
5VX 610	1550
5VX 630	1600
5VX 650	1650
5VX 660	1680
5VX 670	1700
5VX 680	1730
5VX 690	1750
5VX 710	1800
5VX 730	1850
5VX 740	1880
5VX 750	1900
5VX 780	1980
5VX 800	2030
5VX 810	2060
5VX 830	2110
5VX 840	2130
5VX 850	2160
5VX 860	2180
5VX 880	2240
5VX 900	2290
5VX 930	2360
5VX 950	2410
5VX 960	2440
5VX 1000	2540
5VX 1030	2620
5VX 1060	2690
5VX 1080	2740
5VX 1120	2840
5VX 1150	2920
5VX 1160	2950
5VX 1180	3000
5VX 1230	3130
5VX 1250	3180
5VX 1320	3350
5VX 1400	3550
5VX 1500	3810
5VX 1600	4060
5VX 1700	4320
5VX 1800	4570
5VX 1900	4830
5VX 2000	5080

8VX profile


Code	External length (mm)
8VX 1000	2540
8VX 1060	2690
8VX 1120	2840
8VX 1180	3000
8VX 1250	3180
8VX 1320	3350
8VX 1400	3550
8VX 1500	3810
8VX 1600	4060
8VX 1700	4320
8VX 1800	4570
8VX 1900	4830
8VX 2000	5080

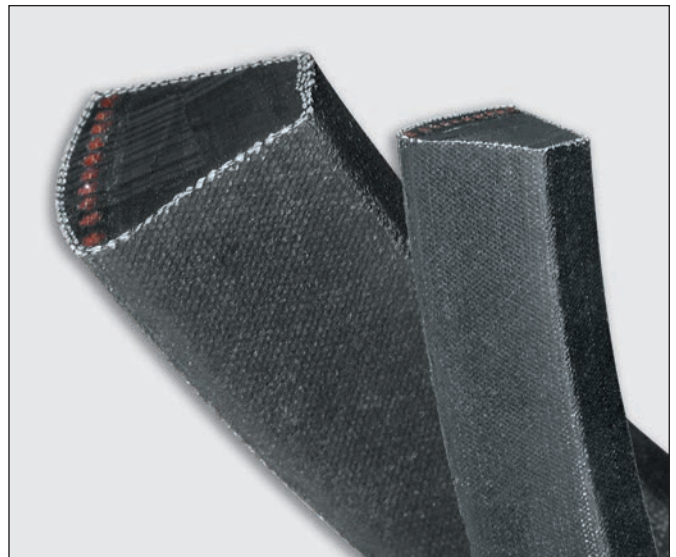

* Raw edge construction / cogged mould


DUNLOP™ V-BELTS

Variable speed belts




17x5 profile

Code	Pitch length (mm)
W 16P	450
W 16P	500
W 16P	560
W 16P	600
W 16P	630
W 16P	710
W 16P	800
W 16P	900
W 16P	1000




42x13 profile

Code	Pitch length (mm)
W 40P	1060
W 40P	1100
W 40P	1120
W 40P	1180
W 40P	1250
W 40P	1400
W 40P	1600
W 40P	1660
W 40P	1800
W 40P	2000
W 40P	2240
W 40P	2500




13x6 profile

Internal length (mm)	Pitch length (mm)
425	455
500	530
525	555
550	580
650	680
675	705
700	730
725	755
750	780
775	805
900	930




30x10 profile

Internal length (mm)	Pitch length (mm)
650	700
665	715
700	750
800	850
850	900
875	925
900	950
950	1000
1000	1050
1035	1085
1050	1100
1120	1170
1200	1250
1320	1370
1340	1390
1500	1550
1600	1650




47x13 profile

Internal length (mm)	Pitch length (mm)
900	1000
950	1010
1000	1060
1060	1120
1120	1180
1180	1240
1250	1310
1320	1380
1400	1460
1500	1560
1600	1660
1700	1760
1800	1860
1900	1960
2000	2060
2240	2300




21x6,5 profile

Code	Pitch length (mm)
W 20P	560
W 20P	630
W 20P	640
W 20P	710
W 20P	800
W 20P	900
W 20P	1000
W 20P	1120
W 20P	1250




52x16 profile

Code	Pitch length (mm)
W 50P	1250
W 50P	1400
W 50P	1600
W 50P	1800
W 50P	2000
W 50P	2240
W 50P	2500
W 50P	2800
W 50P	3150




22x8 profile

Internal length (mm)	Pitch length (mm)
500	540
525	565
550	590
575	615
600	640
610	650
625	665
650	690
675	715
700	740
725	765
750	790
800	840
850	890
900	940
950	990
1000	1040
1060	1100
1120	1160
1180	1220
1250	1290
1320	1360
1400	1440
1500	1540
1600	1640
2000	2040




36x12 profile

Internal length (mm)	Pitch length (mm)
700	755
725	780
800	855
850	905
900	955
950	1005
1000	1055
1060	1115
1120	1175
1180	1235
1250	1305
1320	1375
1400	1455
1500	1555
1600	1655
1700	1755
1800	1855
2000	2055
2120	2175




55x16 profile

Internal length (mm)	Pitch length (mm)
1180	1255
1250	1325
1400	1475
1600	1675
1700	1775
1800	1875
2000	2075
2240	2315




26x8 profile

Code	Pitch length (mm)
W 25P	560
W 25P	690
W 25P	710
W 25P	750
W 25P	790
W 25P	800
W 25P	900
W 25P	1000
W 25P	1120
W 25P	1250
W 25P	1400
W 25P	1600




65x20 profile

Code	Internal length (mm)
W 63P	1600
W 63P	1800
W 63P	2000
W 63P	2240
W 63P	2500
W 63P	2800
W 63P	3150
W 63P	3550
W 63P	4000




28x8 profile

Internal length (mm)	Pitch length (mm)
525	565
600	640
625	665
650	690
700	740
750	790
800	840
850	890
900	940
950	990
1000	1040
1060	1100
1120	1160
1180	1220
1250	1290
1320	1360
1400	1440
1500	1540
1600	1640
1700	1740




37x10 profile

Internal length (mm)	Pitch length (mm)
600	650
650	700
675	725
750	800
800	850
850	900
900	950
950	1000
1000	1050
1060	1110
1120	1170
1180	1230
1250	1300
1320	1370
1400	1450
1500	1550
1600	1650
1700	1750
1800	1850
1900	1950
2000	2050
2240	2290



70x20 profile

Internal length (mm)	Pitch length (mm)
1320	1415
1400	1495
1445	1540
1500	1595
1600	1695
1700	1795
1800	1895
1900	1995
2000	2095
2120	2210
2240	2330
2360	2450
2500	2590
2800	2890




33x10 profile

Code	Pitch length (mm)
W 31,5P	800
W 31,5P	840
W 31,5P	870
W 31,5P	900
W 31,5P	950
W 31,5P	1000
W 31,5P	1050
W 31,5P	1120
W 31,5P	1250
W 31,5P	1400
W 31,5P	1600
W 31,5P	1800
W 31,5P	2000

* Raw edge construction / cogged mould

DUNLOP™ RIBBED BELTS
Rubber Ribbed Belts

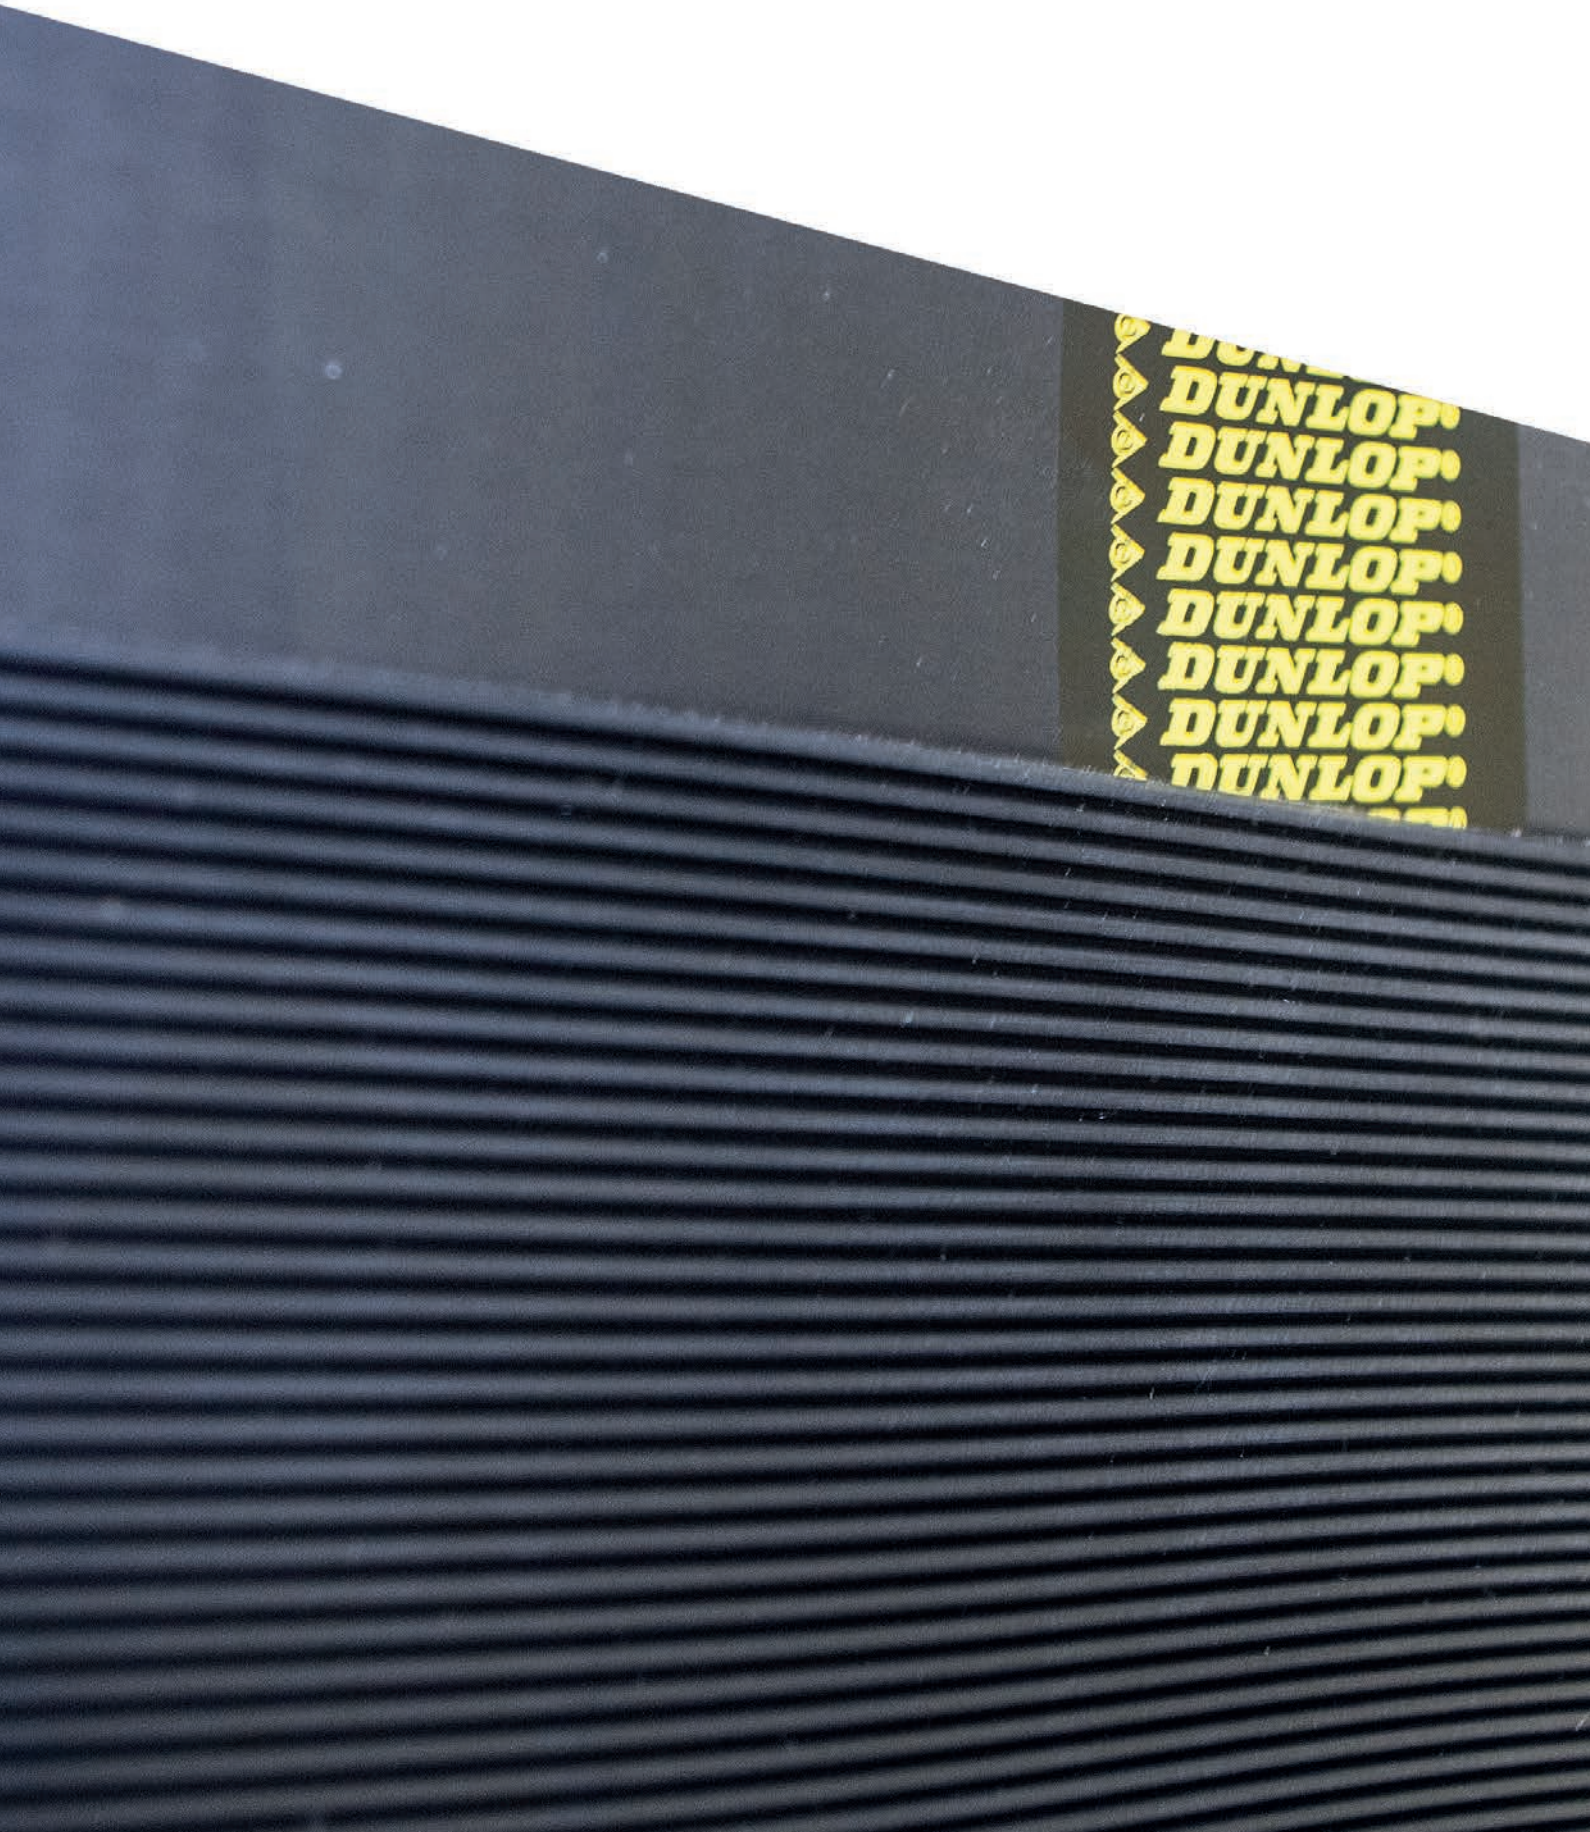

DUNLOP™ RIBBED BELTS

Rubber Ribbed Belts








DUNLOP™ RIBBED RUBBER BELTS are made of polybutadiene compound.

High performance ribbed belts are produced in **H, J, L** and **M** profiles (**K** on request). Ribbed belts design:

- eliminates belt matching;
- permits drive design to meet exact power or space requirements;
- distributes the drive load across the entire belt width;
- permits cooler running and high drive efficiency;
- excels on small pulleys at high speeds.

DUNLOP™ RIBBED rubber belts are also available in elastic version (TEM) and they are suitable in transmissions where fixed centre distance is required. The TEM belt is developed according to the customer requirements (for example: washing machines).



PJ	
Effective length	
(mm)	(inches)
350	13.8
381	15.0
406	16.0
432	17.0
457	18.0
483	19.0
495	19.5
508	20.0
533	21.0
559	22.0
584	23.0
610	24.0
650	25.6
660	26.0
685	27.0
711	28.0
723	28.5
737	29.0
762	30.0
769	30.3
790	31.1
813	32.0
864	34.0
895	35.2
914	36.0
944	37.2
955	37.6
965	38.0
990	39.0
1016	40.0
1036	40.8
1040	40.9
1051	41.4
1065	41.9
1080	42.5
1089	42.9
1092	43.0
1100	43.3
1108	43.6
1116	43.9
1136	44.7
1143	45.0
1150	45.3
1160	45.7
1168	46.0
1170	46.1
1184	46.6
1190	46.9
1194	47.0
1200	47.2
1203	47.4
1210	47.6
1214	47.8
1222	48.1
1232	48.5

PJ	
Effective length	
(mm)	(inches)
1236	48.7
1244	49.0
1262	49.7
1270	50.0
1280	50.4
1287	50.7
1295	51.0
1302	51.3
1315	51.8
1318	51.9
1321	52.0
1326	52.2
1365	53.7
1371	54.0
1397	55.0
1428	56.2
1473	58.0
1524	60.0
1549	61.0
1651	65.0
1752	69.0
1854	73.0
1895	74.6
1910	75.2
1930	76.0
1956	77.0
2083	82.0
2135	84.1
2210	87.0
2337	92.0
2489	98.0

PK	
Effective length	
(mm)	(inches)
630	24.8
650	25.6
675	26.6
700	27.6
730	28.7
755	29.7
775	30.5
800	31.5
830	32.7
845	33.3
870	34.3
885	34.8
920	36.2
925	36.4
950	37.4
970	38.2
1000	39.4
1015	40.0
1035	40.8
1060	41.7
1080	42.5
1145	45.1
1165	45.9
1200	47.2
1230	48.4
1300	51.2
1335	52.6
1385	54.5
1420	55.9
1460	57.5
1490	58.7
1520	59.8
1555	61.2
1610	63.4
1655	65.2
1700	66.9
1725	67.9
1755	69.1
1800	70.9
1860	73.2
1885	74.2
1900	74.8
1980	78.0
2050	80.7
2080	81.9
2145	84.5
2235	88.0
2330	91.7
2490	98.03
2555	100.59


PL	
Effective length	
(inches)	
37.5	
39.0	
42.3	
42.5	
43.3	
47.0	
50.0	
52.0	
52.5	
54.0	
55.0	
56.0	
56.5	
58.0	
61.5	
63.5	
65.5	
67.5	
69.5	
71.0	
72.5	
76.5	
77.0	
78.0	
79.5	
81.5	
82.5	
84.0	
86.5	
88.0	
91.5	
93.0	
97.5	
99.0	
106.5	
108.0	
112.0	
114.0	
115.0	
118.0	
121.5	
123.0	
129.5	
131.0	
137.5	
145.5	
159.5	
165.0	
176.0	
182.0	
198.0	
212.0	
240.0	

PM	
Effective length	
(mm)	
900	
940	
990	
1060	
1115	
1150	
1185	
1230	
1310	
1390	
1470	
1610	
1650	
1760	
1830	
1980	
2130	
2410	
2710	
3010	
3310	
3610	
3910	
4210	
4810	
5410	
6010	
6600	

PH	
Effective length	
(mm)	
594	
1200	
1210	
1265	
1578	
1830	
1869	
1885	
1900	
1904	
1915	
1922	
1930	
1940	
1945	
1975	



DUNLOP™ FLAT BELTS
Rubber and PU flat belts

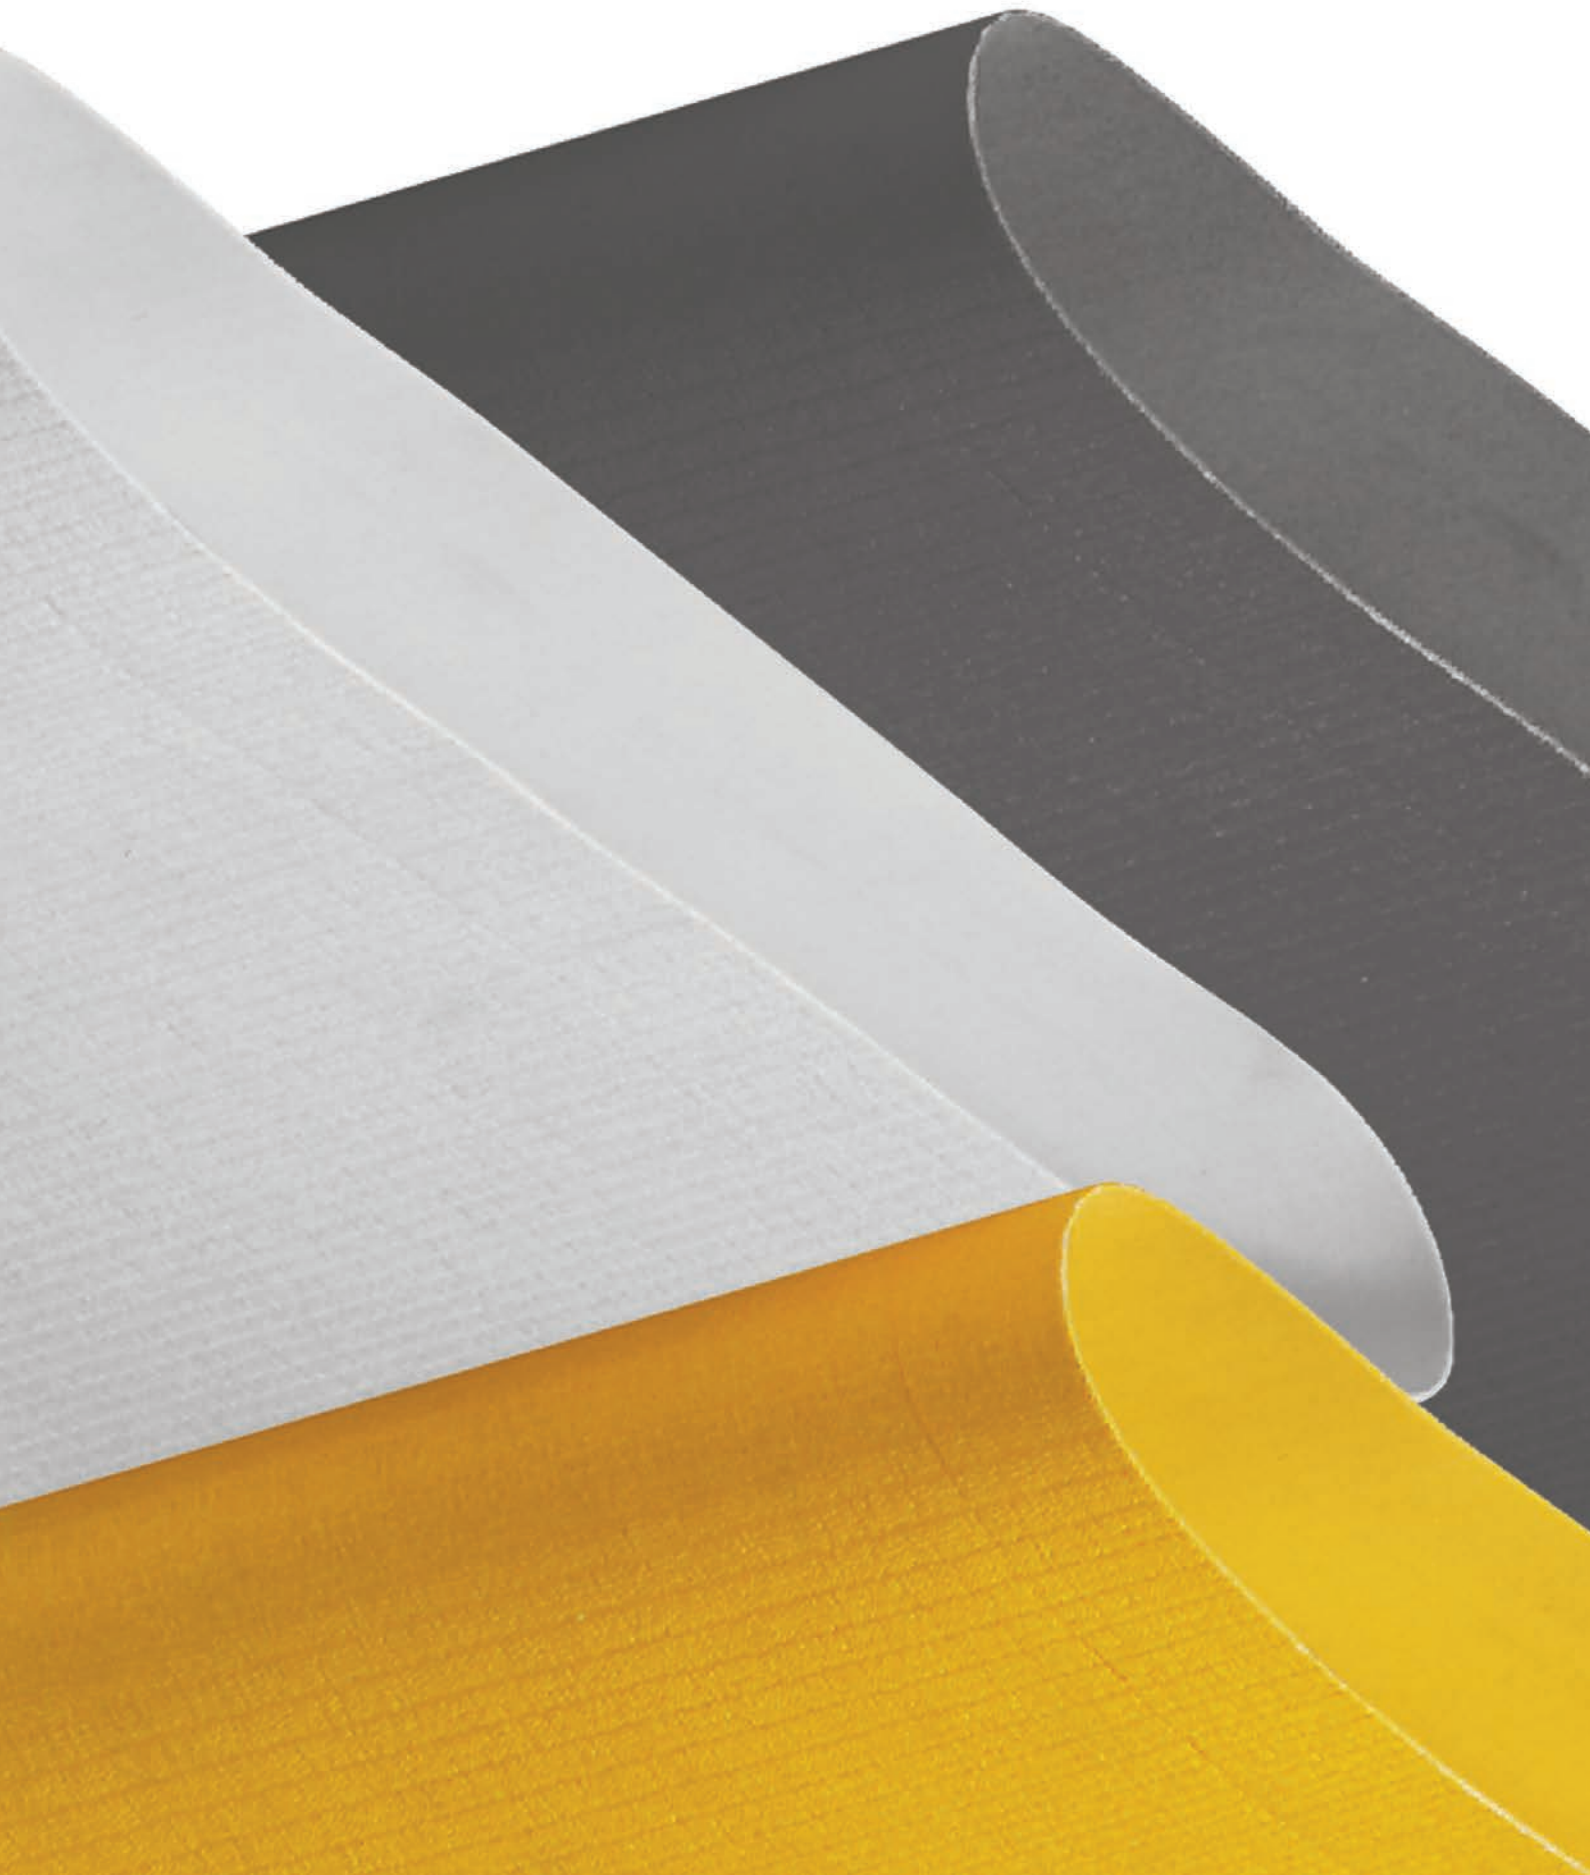

DUNLOP™ FLAT BELTS

Rubber and PU flat belts



DUNLOP™ FLAT rubber and PU belts are truly endless mandrel moulded. They are available in polyurethane or in chloroprene rubber, with either polyester, aramide or cotton reinforcements. Standard sleeves are 330 mm wide.

These belts have the following features:

- High flexibility
- Small pulley diameters
- Dimensional accuracy
- High speed
- Energy efficient
- Low noise and vibration
- Low maintenance
- Good chemical and ozone resistance
- High friction surface

DUNLOP™ FLAT belts are particularly suitable for power transmission and for conveying.

TENSILE REINFORCEMENT
INSTALLATION TENSION x cm WIDTH (N) ENDLESS
MIN. PULLEY DIA. mm
THICKNESS mm
STANDARD LENGTH mm
COATING MATERIAL
ANTISTATIC

T 75	T 150	T 200
Polyester fabric	Polyester fabric	Polyester fabric
150	300	400
6	15	20
0,5	0,9	1,1
200/3850	200/3850	200/3850
NEOPRENE	NEOPRENE	NEOPRENE
YES	YES	YES

TENSILE REINFORCEMENT
INSTALLATION TENSION x cm WIDTH (N) ENDLESS
MIN. PULLEY DIA. mm
THICKNESS mm
STANDARD LENGTH mm
COATING MATERIAL
ANTISTATIC


P 0	P 102	P 108	P 110
No fabric	Elastic fabric/nylon	Polyester/cotton	Polyester fabric
-	10	200	150
8	25	5	12
0,9	1,8	0,8	1
240/1200	240/2500	240/3850	240/3850
POLYURETHANE	POLYURETHANE	POLYURETHANE	POLYURETHANE
NO	POSSIBLE	POSSIBLE	POSSIBLE

TENSILE REINFORCEMENT
INSTALLATION TENSION x cm WIDTH (N) ENDLESS
MIN. PULLEY DIA. mm
THICKNESS mm
STANDARD LENGTH mm
COATING MATERIAL
ANTISTATIC

P 120	P 155	S 110
Polyester fabric	Aramid/polyester	Polyester fabric
350	400	125
20	25	12
1,5	2	1,0
240/3850	240/3850	240/3850
POLYURETHANE	POLYURETHANE	SILICON
POSSIBLE	POSSIBLE	POSSIBLE






DUNLOP™ PU BELTS
PU timing belts sleeves

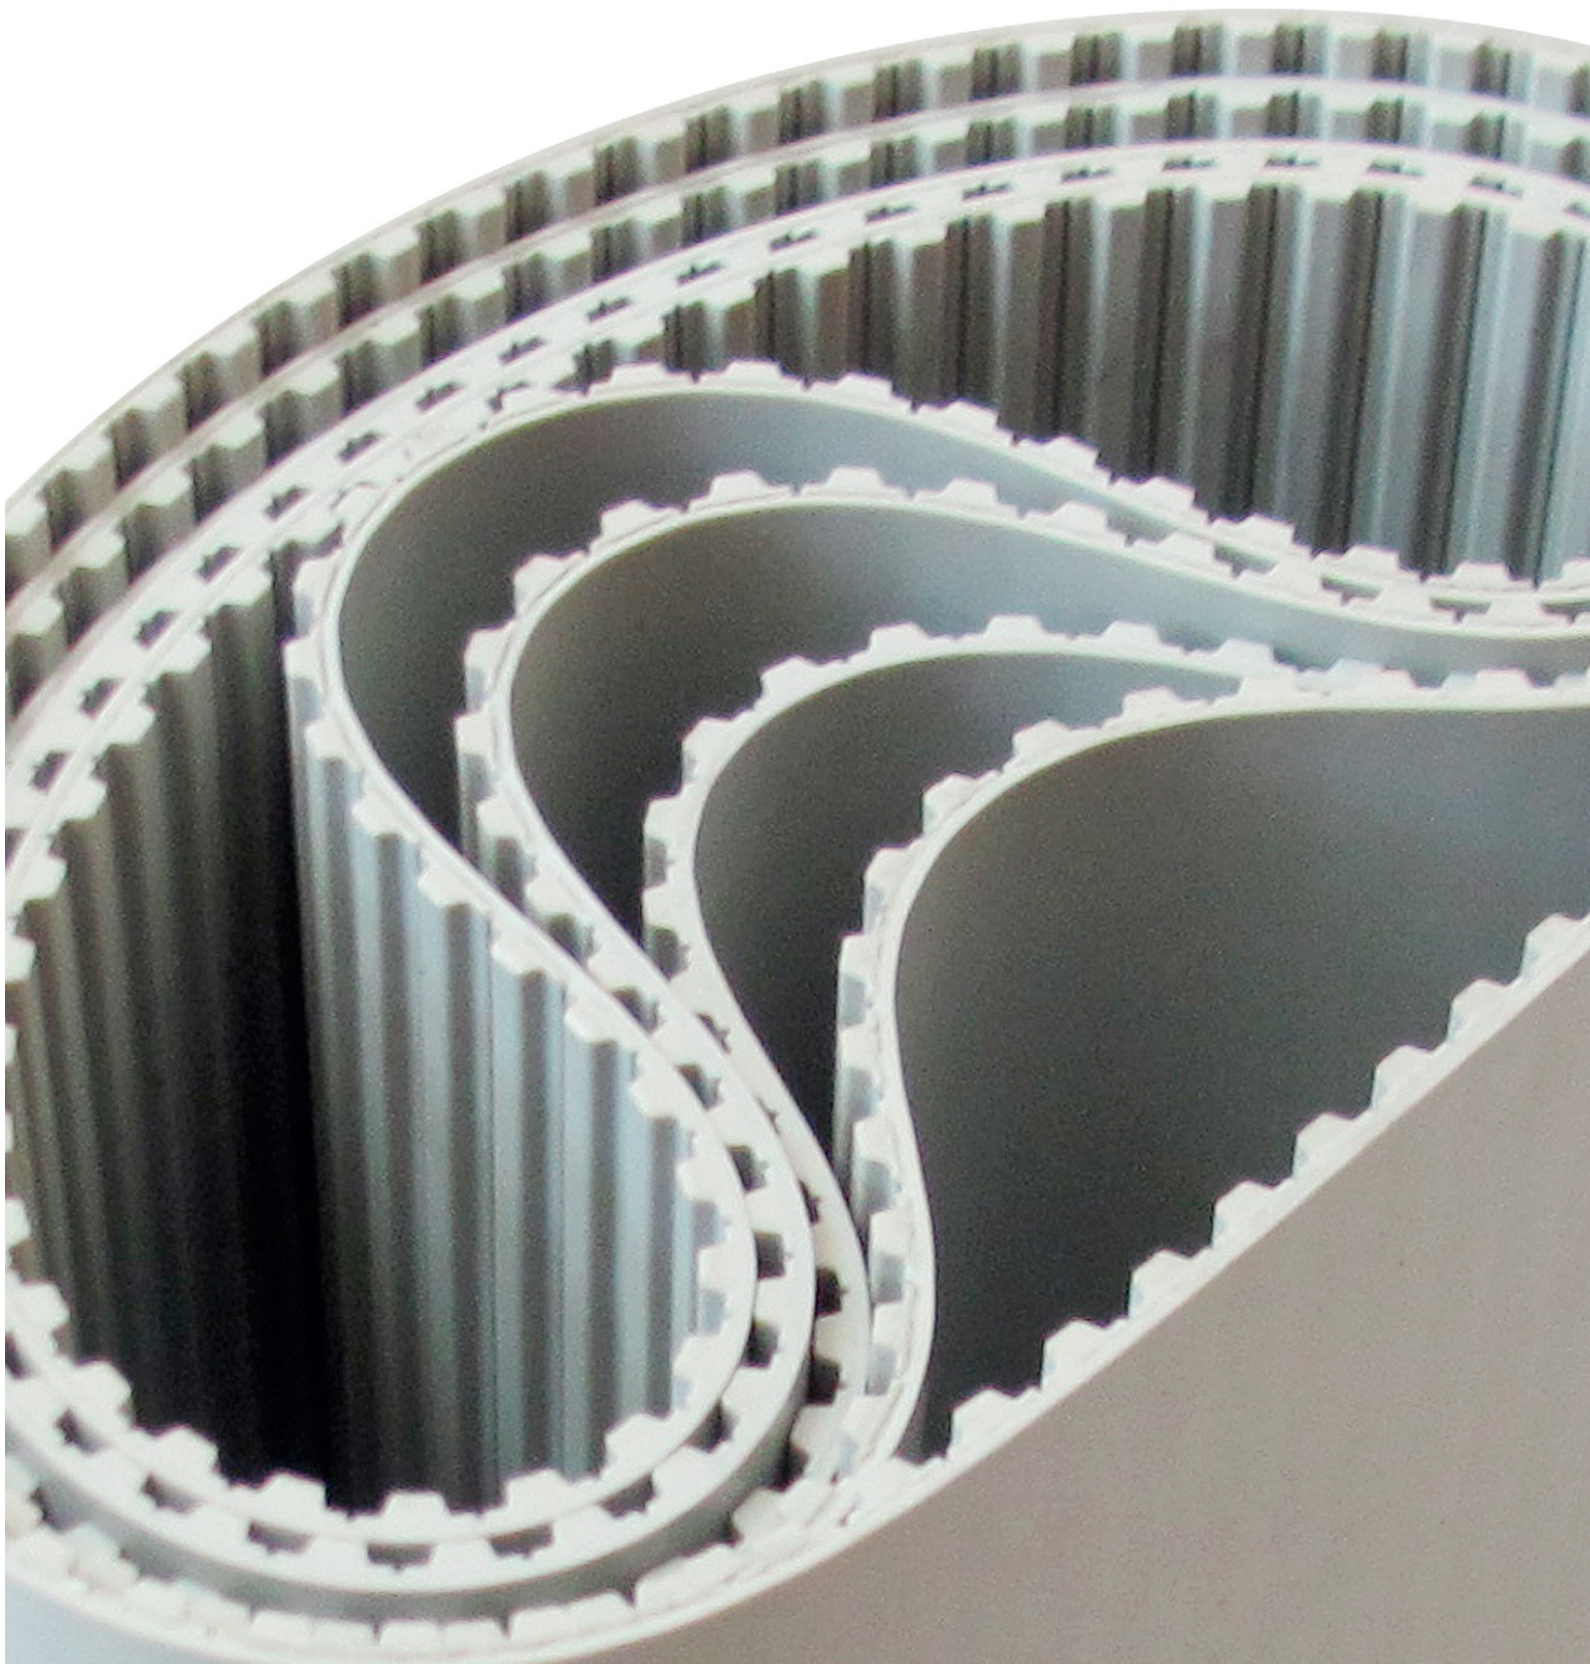

DUNLOP™ PU BELTS

PU timing belts sleeves

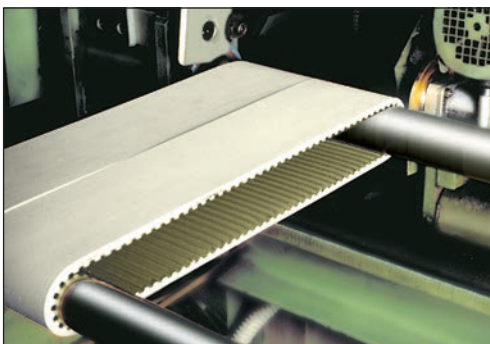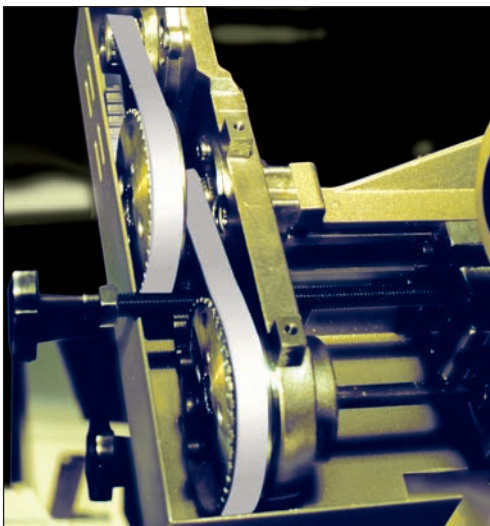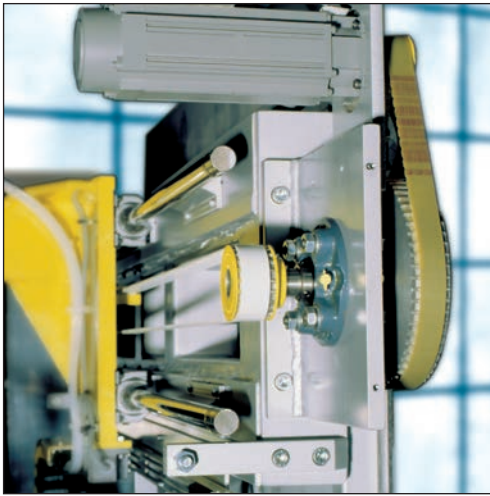

DUNLOP™ PU Timing Belts are manufactured with a unique thermoset moulding process.

The high-grade polyurethane gives excellent abrasion and shear resistance, combined with a variety of graded steel cords, ensuring high strength and tractive resistance. The result is a timing belt with excellent dimensional stability. DUNLOP™ moulded Timing Belts are manufactured to a tight tolerance range, which assures consistent length and thickness. The combination of these factors results in DUNLOP™ PU Timing Belts performing to the highest physical and chemical levels.

Special compounds and cords have to be tested and homologated on the application. DUNLOP™ Industrial Belts is not responsible for wrong functioning of special products.

DUNLOP™ PU belts are suitable for high power, precision motion and control even with high speed.

These belts have the following features:


MECHANICAL features

- Consistent dimensional stability
- Low pre-tension
- Low noise
- High abrasion resistance
- Low maintenance
- High flexibility
- Linear speeds up to 80 m/sec

CHEMICAL features

- Good resistance to
 - Aging,
 - Hydrolysis,
 - UVA rays,
 - Ozone
- Working temperature: -25 °C to +80 °C (up to +110 °C for short periods)
- High resistance to oils, fats and greases
- Good resistance to most acids and Alkalis


DUNLOP™ PU Timing Belts perform especially well on light synchronised and stepped drives, in office automation and domestic appliances applications.

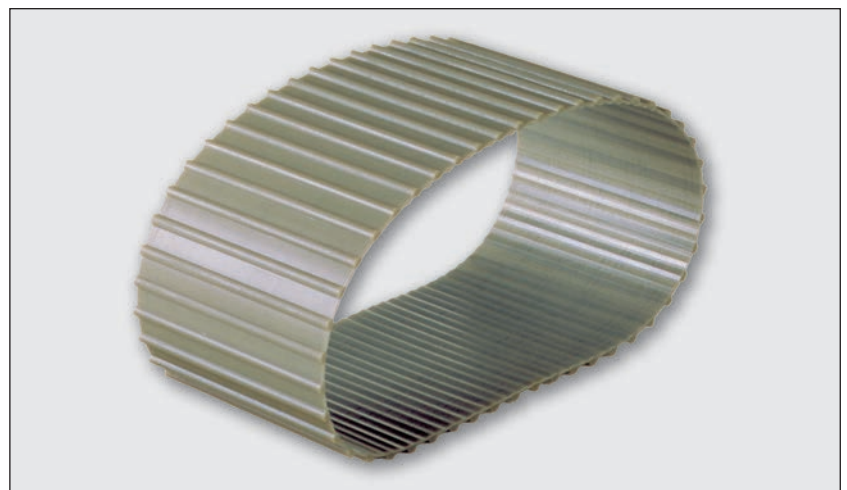


DUNLOP™ PU BELTS

PU timing belts sleeves


T2 - T2.5 - T5 - T10

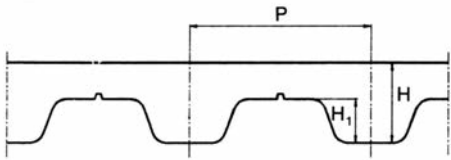


T5 - T10* available without nose

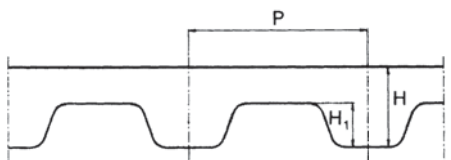


T2.5 DL - T5 DL - T10 DL

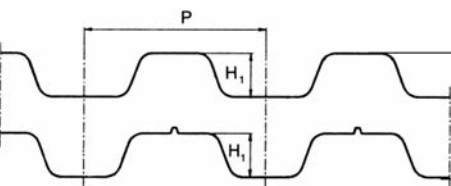

AT5 - AT10

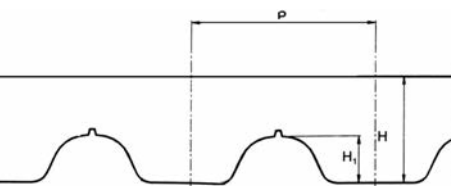

MXL - XL - L - H

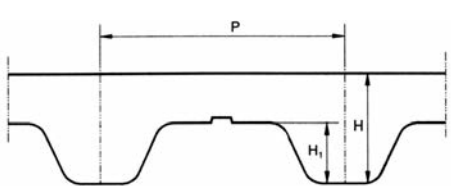

T2.5	
Std. width (mm)	
4/6/8/10/12	

T5	
Std. width (mm)	
6/8/10/12/16/20/25	

T10	
Std. width (mm)	
10/12/16/20/25/32/50/75	

T2.5 DL	
Std. width (mm)	
4/6/8/10/12	

T2.5	
Code	Pitch length (mm)
120	120
145	145
160	160
177,5	177,5
180	180
182,5	182,5
200	200
210	210
230	230
245	245
265	265
277,5	277,5
285	285
290	290
305	305
317,5	317,5
330	330
342,5	342,5
380	380
420	420
480	480
500	500
540	540
600	600
620	620
650	650
680	680
700	700
780	780
880	880
915	915
950	950
1185	1185

T5	
Code	Pitch length (mm)
120	120
150	150
165	165
180	180
185	185
200	200
210	210
215	215
220	220
225	225
245	245
250	250
255	255
260	260
270	270
275	275
280	280
295	295
300	300
305	305
330	330
340	340
350	350
355	355
365	365
375	375
390	390
400	400
410	410
420	420
425	425
440	440
445	445
450	450
455	455
460	460
475	475
480	480
500	500
510	510
515	515
515*	515*
525	525
545	545
550	550
560	560
560*	560*
575	575
590	590
600	600
610	610
620	620
630	630
640	640
650	650
660	660
675	675
690	690
700	700
720	720
725	725
750	750
765	765
780	780
800	800
815	815
830	830
840	840
850	850
860	860
885	885
900	900
920	920
940	940
990	990
1075	1075
1100	1100
1160	1160
1200	1200
1215	1215
1275	1275
1280	1280
1315	1315
1355	1355
1380	1380
1440	1440
1470	1470
1500	1500
1580	1580
1955	1955

T10	
Code	Pitch length (mm)
260	260
320	320
340	340
370	370
390	390
400	400
410	410
440	440
450	450
480	480
500	500
530	530
550	550
560	560
600	600
600*	600*
610	610
630	630
630*	630*
650	650
660	660
680	680
690	690
700	700
720	720
720*	720*
730	730
750	750
780	780
800*	800*
810	810
840	840
850	850
880	880
890	890
900	900
900*	900*
910	910
920	920
920*	920*
950	950
960	960
970	970
980	980
1000	1000
1010	1010
1050	1050
1080	1080
1100	1100
1110	1110
1140	1140
1150	1150
1200	1200
1210	1210
1240	1240
1250	1250
1300	1300
1320	1320
1350	1350
1390	1390
1400	1400
1420	1420
1440	1440
1450	1450
1460	1460
1500	1500
1560	1560
1600	1600
1610	1610
1700	1700
1750	1750
1780	1780
1880	1880
1960	1960
2250	2250

T2.5 DL	
Code	Pitch length (mm)
457,5 DL	457,5

P	2,5
H	1,3
H1	0,7

T5 DL	
Std. width (mm)	
6/8/10/12/16/20/25	

T5 DL	
Code	Pitch length (mm)
410 DL	410
460 DL	460
515 DL	515
525 DL	525
550 DL	550
590 DL	590
620 DL	620
685 DL	685
700 DL	700
750 DL	750
815 DL	815
840 DL	840
860 DL	860
940 DL	940
1100 DL	1100

P	5
H	2,2
H1	1,2

T10 DL	
Std. width (mm)	
10/12/16/20/25/32/50/75	

T10 DL	
Code	Pitch length (mm)
260 DL	260
530 DL	530
630 DL	630
660 DL	660
700 DL	700
720 DL	720
800 DL	800
840 DL	840
900 DL	900
920 DL	920
980 DL	980
1010 DL	1010
1100 DL	1100
1150 DL	1150
1210 DL	1210
1240 DL	1240
1250 DL	1250
1320 DL	1320
1350 DL	1350
1420 DL	1420
1610 DL	1610
1880 DL	1880

T2	
Std. width (mm)	
4/6/8/10/12	

T2	
Code	Pitch length (mm)
180	180
200	200
288	288

P	2
H	1,1
H1	0,5

P	2,5
H	1,3
H1	0,7

P	5
H	2,2
H1	1,2

P	10
H	4,5
H1	2,5

P	10
H	4,5
H1	2,5

DUNLOP™ PU BELTS

PU timing belts sleeves

AT5	
Std. width (mm)	
6/8/10/12/16/20/25	

AT10	
Std. width (mm)	
10/12/16/20/25/32/50/75	

MXL	
Std. width (mm)	
3,2/4,8/6,4	

XL	
Std. width (mm)	
6,4/7,9/9,4	

L	
Std. width (mm)	
12,7/19,1/25,4	

H	
Std. width (mm)	
19,1/25,4/38,1/50,8/76,2	

AT5	
Code	Pitch length (mm)
225	225
255	255
275	275
280	280
300	300
330	330
340	340
375	375
390	390
420	420
450	450
455	455
480	480
500	500
525	525
545	545
600	600
610	610
620	620
630	630
660	660
670	670
710	710
720	720
750	750
780	780
825	825
860	860
975	975
1050	1050
1125	1125
1500	1500
2000	2000

AT10	
Code	Pitch length (mm)
370	370
500	500
560	560
580	580
600	600
610	610
630	630
660	660
700	700
730	730
780	780
800	800
810	810
840	840
880	880
890	890
920	920
960	960
980	980
1000	1000
1010	1010
1050	1050
1080	1080
1100	1100
1150	1150
1190	1190
1200	1200
1210	1210
1220	1220
1230	1230
1240	1240
1250	1250
1280	1280
1300	1300
1320	1320
1350	1350
1360	1360
1400	1400
1420	1420
1480	1480
1500	1500
1600	1600
1630	1630
1700	1700
1720	1720
1800	1800
1860	1860
1940	1940

MXL	
Code	Pitch length (mm)
80055	111,7
80057	115,8
80060	121,9
80070	142,2
80072	146,3
80075	152,4
80076	154,4
80079	160,5
80080	162,5
80082	166,6
80088	178,8
80091	184,9
80092	186,9
80096	195,1
80101	205,2
80102	207,2
80103	209,2
80105	213,3
80110	223,5
80114	231,6
80118	239,7
80120	243,8
80130	264,1
80132	268,2
80135	274,3
80140	284,4
80145	294,6
80150	304,8
80155	314,9
80175	355,6
80190	386,5
80200	406,8
80221	449,1
80256	520,1
80280	568,9
80285	579,1
80308	625,8
80332	674,6
80352	715,2
80360	731,5
80395	802,6
80405	822,9
80412	837,1
80432	877,8
80454	922,5
80485	985,5

XL	
Code	Pitch length (mm)
60	152,4
70	177,8
76	193,0
80	203,2
90	228,6
100	254,0
110	269,4
120	304,8
130	330,2
134	340,3
140	355,6
150	381,0
160	406,4
170	431,8
180	457,2
190	482,6
194	492,7
200	508,0
210	533,4
220	558,8
230	584,2
240	609,6
250	635,0
260	660,4
270	685,8
288	731,5
290	736,6
300	762,0
356	904,2
414	1051,5
450	1143,0
566	1437,6

L	
Code	Pitch length (mm)
86	218,6
124	314,3
150	381,0
173	438,1
187	476,2
202	514,4
210	533,4
225	571,5
240	609,6
255	647,7
270	685,8
285	723,9
300	762,0
322	817,9
345	876,3
367	933,4
390	990,6
420	1066,8
450	1143,0
480	1219,2
510	1295,4
540	1371,6
570	1447,8
600	1524,0

H	
Code	Pitch length (mm)
230	584,2
240	609,6
270	685,8
300	762,0
330	838,2
360	914,4
390	990,6
420	1066,8
450	1143,0
480	1219,2
510	1295,4

P	12,7
---	------

H	4,3
---	-----

H1	2,29
----	------

P	5
H	2,7
H1	1,2

P	10
H	4,5
H1	2,5


P	2,032
H	1,2
H1	0,51

P	5,080
H	2,25
H1	1,25


P	9,525
---	-------

H	3,6
---	-----

H1	1,9
----	-----



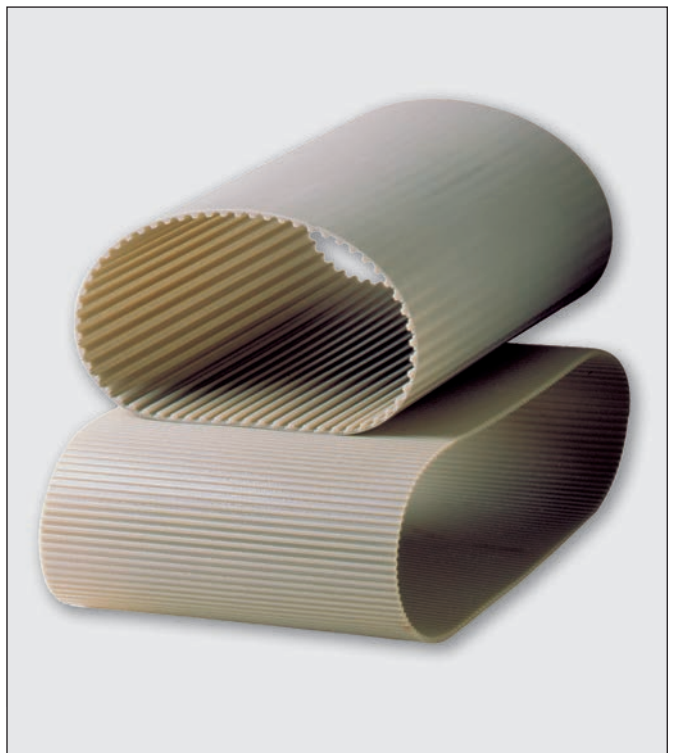


DUNLOP™ PU BELTS
PU timing belts rolls

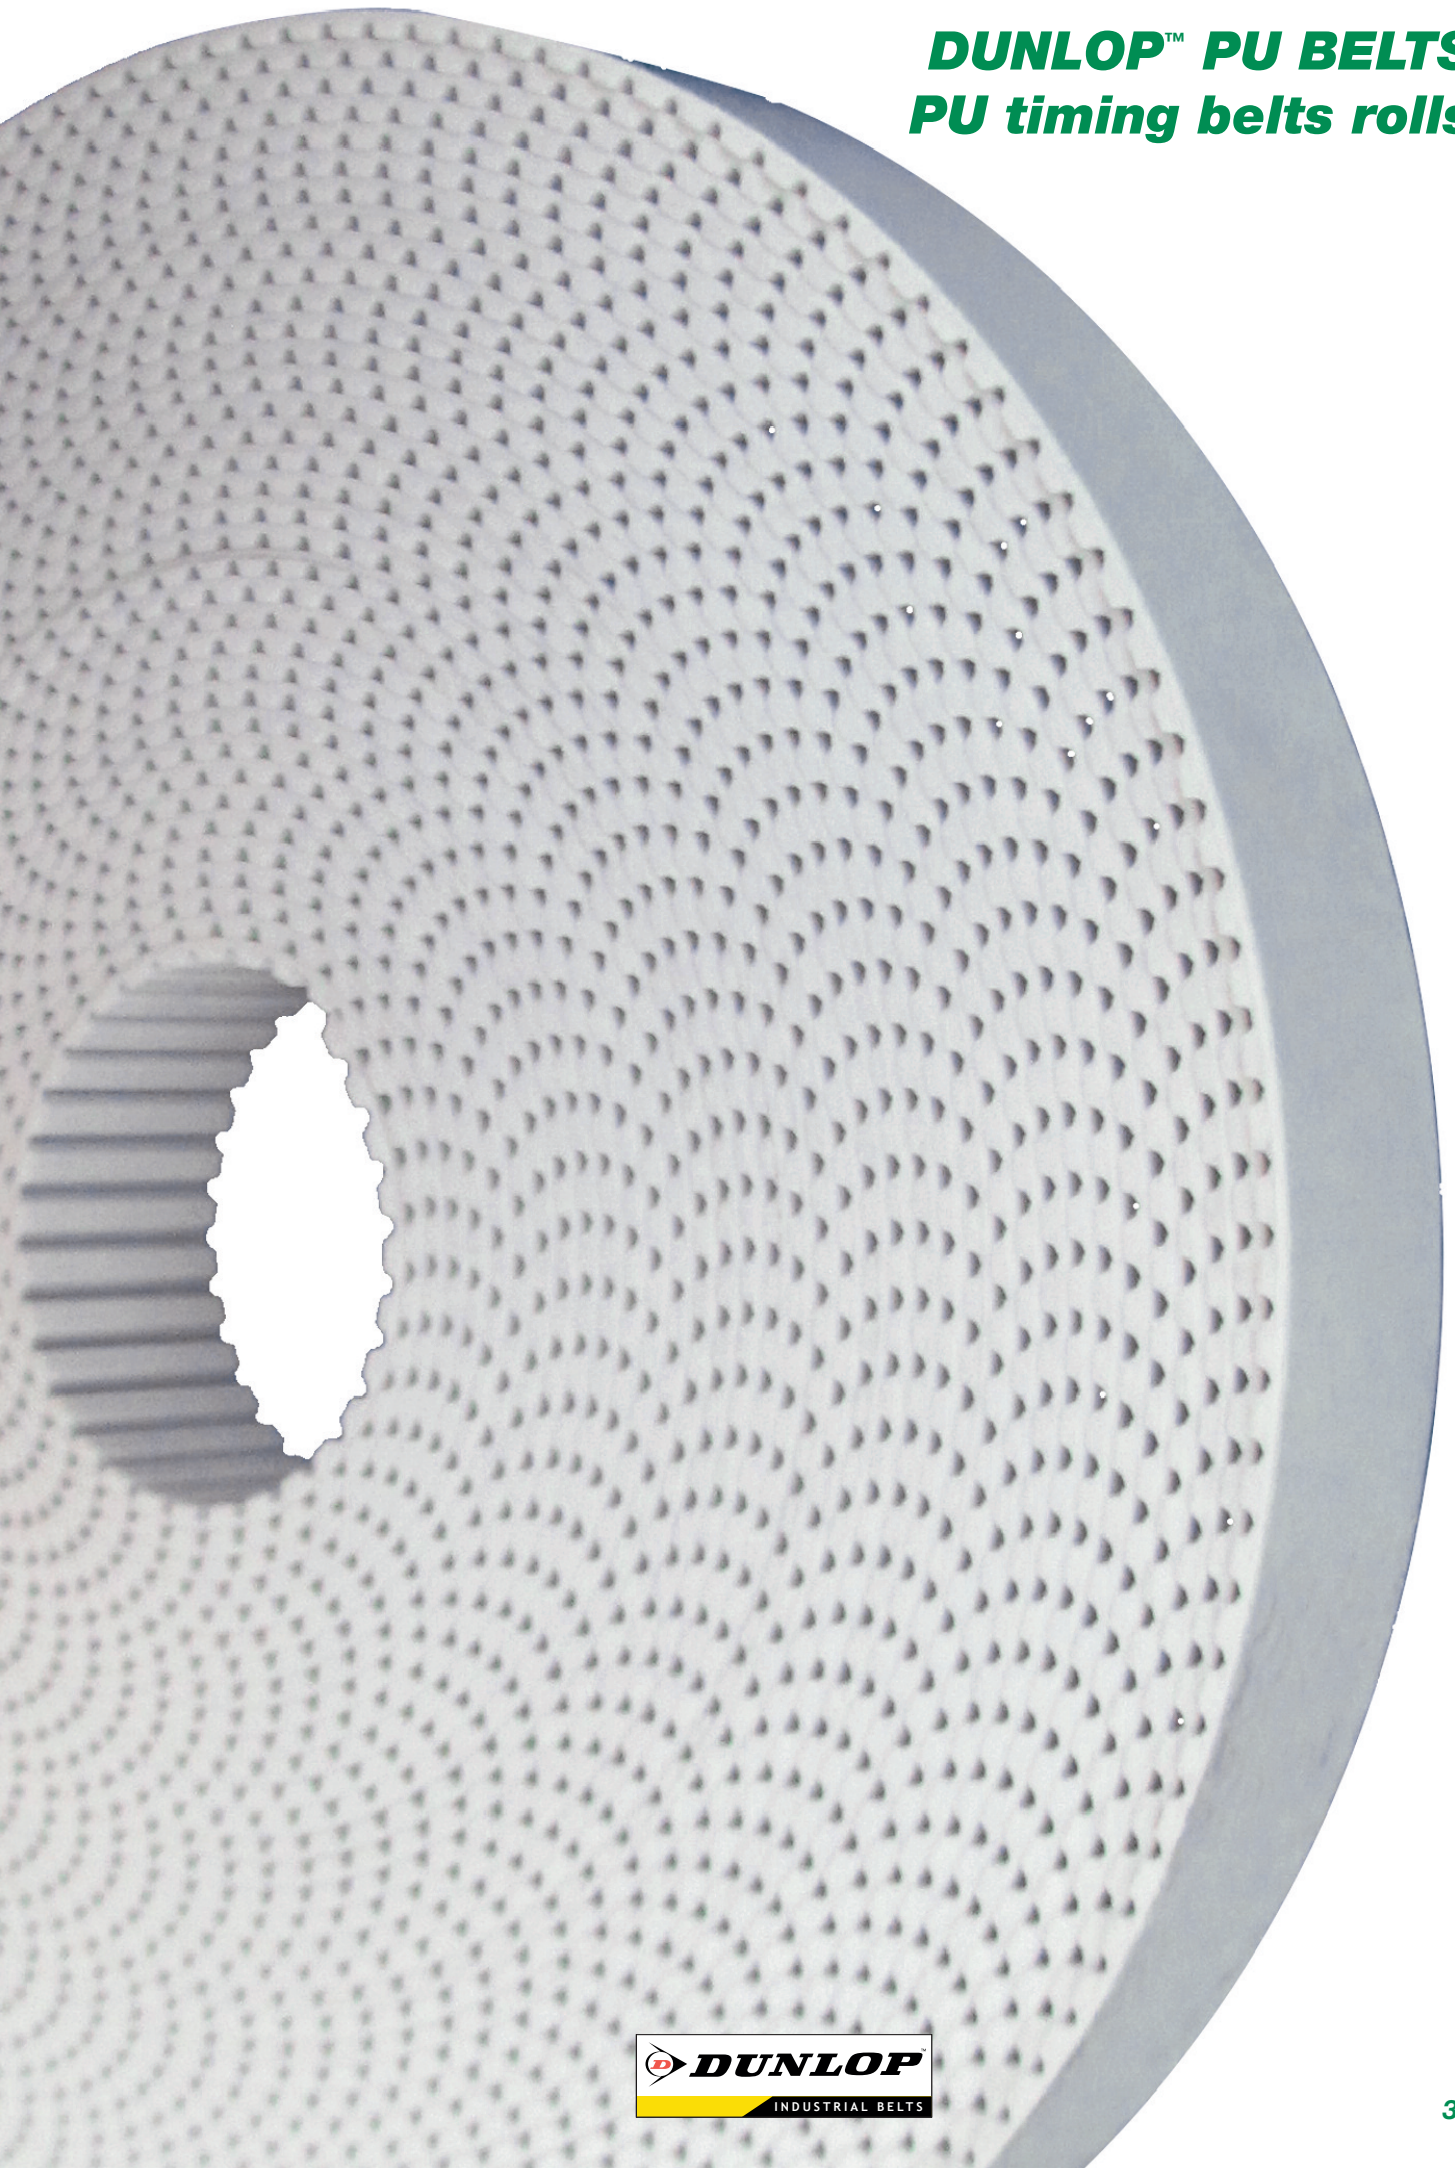

DUNLOP™ PU BELTS

PU timing belts rolls

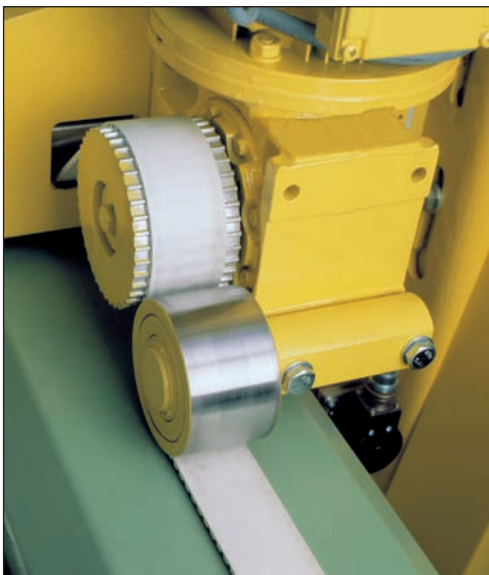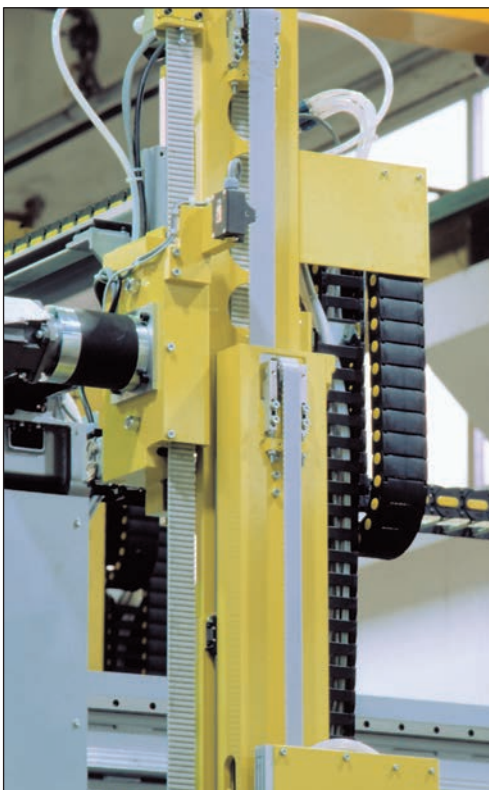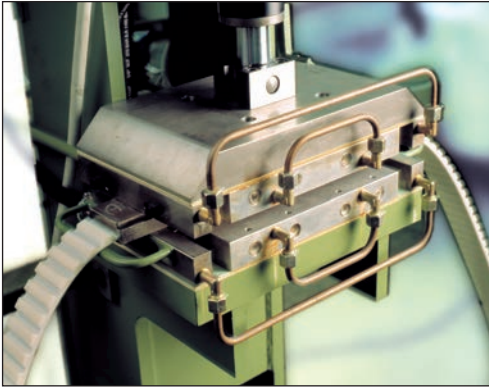

DUNLOP™ PU OPEN END TIMING BELTS are manufactured in thermoplastic polyurethane, that gives superior wear and abrasion resistance. Various grades of steel cords offer good running characteristics, even with high tractive loads.

Manufactured to tight tolerances, Megalinear delivers reliability and excellent dimensional stability. The addition of a Nylon coating on the tooth and/or the back of the belt during production, enhances the running properties for specific applications. An extra thickness of polyurethane is also possible on the back of the belt, offering extra protection against aggressive or heavy products.

They offers the following features:

MECHANICAL features

- Consistent dimensional stability
- Low pre-tension
- Low noise
- High abrasion resistance
- Low maintenance
- High flexibility
- Linear speeds up to 80 m/sec
- High precision linear positioning

CHEMICAL features

- Good resistance to
 - Aging,
 - Hydrolisis,
 - UVA rays,
 - Ozone
- Working temperature: -25 °C to +80 °C (up to +110 °C for short periods)
- High resistance to oils, fats and greases
- Good resistance to most acids and Alkalis
- Compatible for fabrication with other thermoplastic materials

DUNLOP™ PU OPEN END TIMING BELTS can be supplied as open length rolls, or as endless jointed belts.

OPEN END Belts

These are manufactured as continuous lengths, with the reinforcement in a parallel configuration. Standard roll lengths are 50 or 100 metres. Other lengths available on request.

DUNLOP™ OPEN END PU TIMING BELTS are normally used in linear motion drives.

ENDLESS JOINTED belts

By jointing using the thermoplastic properties of the open length belt, endless belts can be produced to any length by welding. The finished joint is resistant to fatigue from flexing and tension, due to the unique symmetrical Vee shaped pattern of the joint.

Endless jointed belts are suitable for conveying applications, particularly when indexing and/or positive drive is required. Supplementary application of flights, profiles and coatings is possible, to suit specific applications.


They are also available with alternative reinforcement cords such as, Kevlar (K), High Flex (HF), High Performance (HP) and High Performance Flex (HPF).




DUNLOP™ PU BELTS

PU timing belts rolls


T2,5 - T5 - T10 - T20

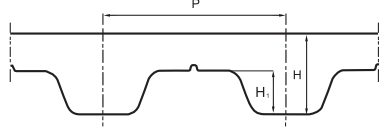


AT3 - AT5 - AT10 - AT20




HTD 3M - HTD 5M - HTD 8M - HTD 14M




STD 5M - STD 8M

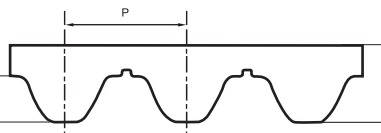


RPP5 - RPP8 - RPP14




MXL - XL - L - H - XH



P1 - P2 - P4



TG5 - TG10 - TG20 - ATG5 - ATG10 - ATG20 - HG

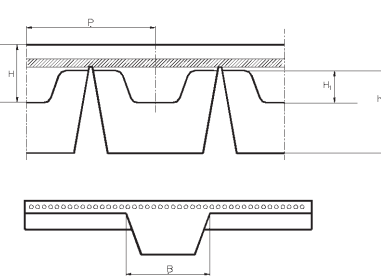

HTD 3M

Std. width (mm)

10
20
25
50

HTD 5M

Std. width (mm)

10
15
25
50

HTD 8M

Std. width (mm)

10
15
20
30
50
85
100

HTD 14M

Std. width (mm)

25
40
55
85
100
115

P 3

H 2,2

H1 1,13

P 5

H 3,6

H1 2,1

P 8

H 5,6

H1 3,4

P 14

H 10

H1 6,1

RPP5

Std. width (mm)

10
15
25
30
50
75

RPP8

Std. width (mm)

10
15
20
30
50
85
100

RPP14

Std. width (mm)

40
55
85
115
150

P 5

H 3,8

H1 2

P 8

H 5,4

H1 3,2

P 14

H 10

H1 6

TG5 K6

Std. width (mm)

25
32
50

TG10 K6

Std. width (mm)

50

TG10 K13

Std. width (mm)

25
32
50
75
100

TG20 K13

Std. width (mm)

50
75
100

P 5

H 2,2

H1 1,2

B 6

h 4

P 10

H 4,5

H1 2,5

B 6

h 3,3

P 10

H 4,5

H1 2,5

B 13

h 6,5

P 20

H 8

H1 5

B 13

h 5,5

ATG5 K6

Std. width (mm)

25
32
50

ATG10 K13

Std. width (mm)

25
32
50
75
100
150

ATG20 K13

Std. width (mm)

75
150

HG K13

Std. width (inches)

1,50
2,00
3,00
4,00

P 5

H 2,7

H1 1,2

B 6

h 4

P 10

H 4,5

H1 2,5

B 13

h 7

P 20

H 8

H1 5

B 13

h 6,4

P 12,7

H 4,3

H1 2,29

B 13

h 6,29

DUNLOP™ PU BELTS

PU timing belts rolls


MXL		XL		L		H		H*		XH	
Std. width (inches)		Std. width (inches)		Std. width (inches)		Std. width (inches)		Std. width (inches)		Std. width (inches)	
0.17 0.37 0.50		0.25 0.37 0.50 0.75 1.00 1.50 2.00		0.37 0.50 0.75 1.00 1.50 2.00 4.00		0.50 0.75 1.00 1.50 2.00 3.00 4.00 6.00		8.00 20.00		1.00 1.50 2.00 3.00 4.00 6.00	
P	2,032	P	5,08	P	9,525	P	12,7	P	12,7	P	22,225
H	1,14	H	2,3	H	3,6	H	4,3	H	4,3	H	11,2
H1	0,66	H1	1,27	H1	1,90	H1	2,29	H1	2,29	H1	6,35

T2,5		T5		T10		T10*		T20	
Std. width (mm)		Std. width (mm)		Std. width (mm)		Std. width (mm)		Std. width (mm)	
10 16 20		6 10 16 25 32 50 75 100		12 16 25 32 50 75 100 150		200 250 300 400 450 500		25 32 50 75 100 150	
P	2,5	P	5	P	10	P	10	P	20
H	1,3	H	2,2	H	4,5	H	4,5	H	8
H1	0,7	H1	1,2	H1	2,5	H1	2,5	H1	5

AT3		AT5		AT10		AT20	
Std. width (mm)		Std. width (mm)		Std. width (mm)		Std. width (mm)	
10 20 25 50		6 10 16 25 32 50 75 100		16 25 32 50 75 100 150		25 32 50 75 100 150 200	
P	3	P	5	P	10	P	20
H	1,9	H	2,7	H	4,5	H	8
H1	1,1	H1	1,2	H1	2,5	H1	5

STD 5M		STD 8M	
Std. width (mm)		Std. width (mm)	
10 15 25 50		10 12 15 20 30 50 85	
P	5	P	8
H	3,4	H	5,1
H1	1,91	H1	3,05

P1		P2		P4	
Std. width (mm)		Std. width (mm)		Std. width (mm)	
10 20		25 50 75 100		25 50 100	
H	1	H	2	H	4

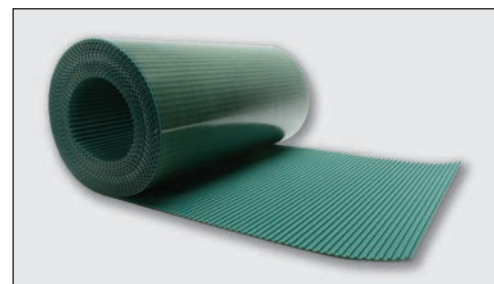


*Only with kevlar cords and reduced number of cords

DUNLOP™ PU BELTS
True-endless timing belts



DUNLOP™ PU BELTS

True-endless timing belts

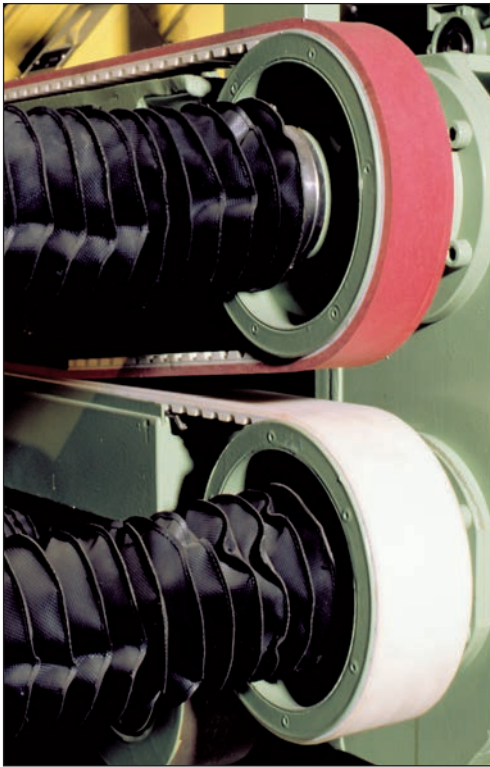

DUNLOP™ PU TRUE ENDLESS TIMING BELTS are manufactured in thermoplastic polyurethane, with continuous spiral steel cords.

This type of belt, developed by our Research & Development, offers good running characteristics and high traction loads.


They are especially suited for power transmission and conveying with high loads and high speeds (up to 10.000 RPM).

The addition of a nylon coating on the teeth during production enhances the running properties for specific applications and reduces the noise frictional coefficient.

An extra thickness of special coating is also possible on the back of the belt offering extra protection against aggressive or heavy products.

DUNLOP™ PU TRUE ENDLESS TIMING BELTS are truly endless, enabling them to deliver exceptional performance.

DUNLOP™ PU TRUE ENDLESS TIMING BELTS ARE AVAILABLE FROM 1.500 MM TO 22.700 MM LENGTH.

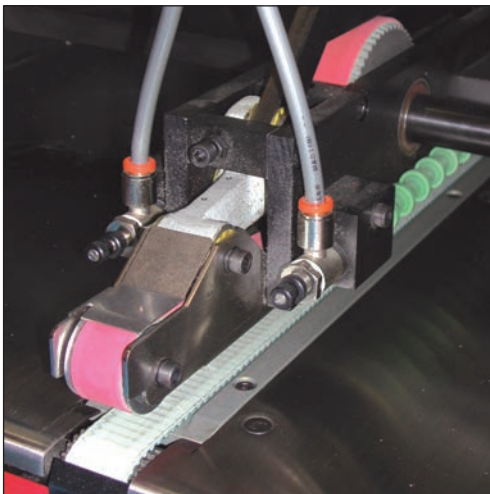

DUNLOP™ PU TRUE ENDLESS Special constructions

- High flex cords
- (NFT) nylon fabric on the teeth (available from 1.900 mm length)
- Custom milling, grinding and drilling to specification
- Additional continuous coatings on the back of the belt in:
 - PU 85° ShA
 - Tenax 50° ShA
 - Linatex 40° ShA
 - Yellow PUR 60° ShA
 - Grey PUR 60° ShA
 - Neoprene rubber 70° ShA


Other hardnesses available on request.




DUNLOP™ PU BELTS

True-endless timing belts


T5 - T10 - T20

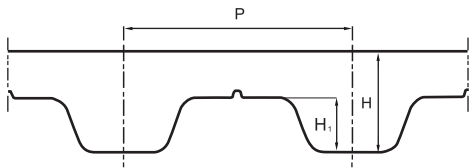


T5 DL - T10 DL - T20 DL

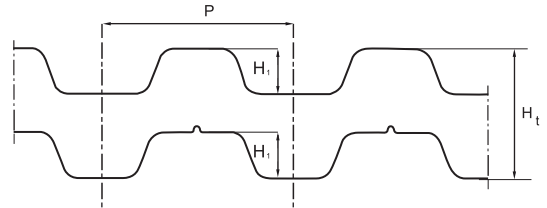


AT5 - AT10 - AT20

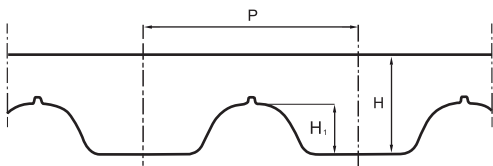


AT5 DL - AT10 DL - AT20 DL

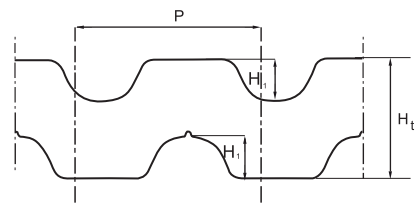


XL - L - H - XH

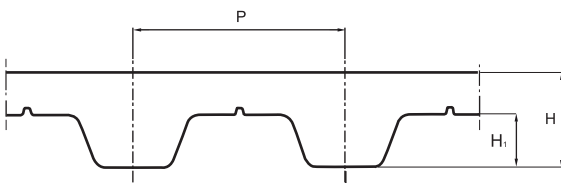


XL DL - L DL - H DL - XH DL

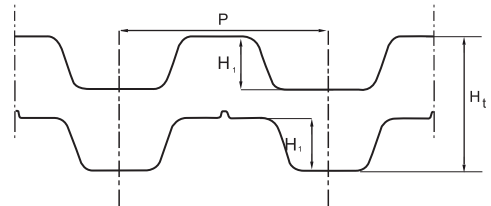


RPP5 - RPP8 - RPP14

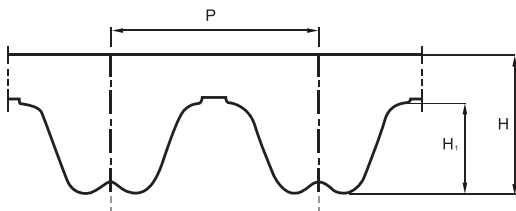


RPP5 DL - RPP8 DL - RPP14 DL

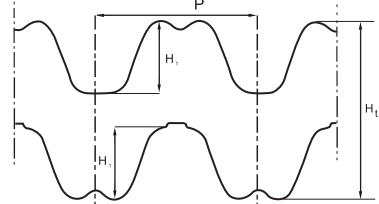


MTD 8M

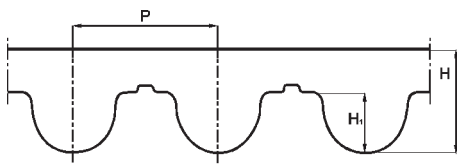

P2



ATG10

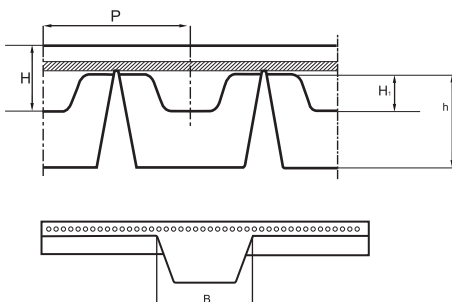

P2

Std. width (mm)

25
50
75
100
150

P 2,0

ATG10 K13

Std. width (mm)

10
16
25
32
50
75
100
150

P 10

H 4,5

Hi 2,5

B 13

h 6,4

MTD 8M

Std. width (mm)

10
16
25
32
50
75
100
150

P 8

H 5,6

Hi 3,4


DUNLOP™ PU BELTS

True-endless timing belts


T5/T5DL		T10/T10DL		T20/T20DL	
Std. width (mm)		Std. width (mm)		Std. width (mm)	
	10		10		10
	16		16		16
	25		25		25
	32		32		32
	50		50		50
	75		75		75
	100		100		100
	150		150		150
P	5	P	10	P	20
H	2,2	H	4,5	H	8
H ₁	1,2	H ₁	2,5	H ₁	5
H _t	3,4	H _t	7	H _t	13



AT5/AT5DL		AT10/AT10DL		AT20/AT20DL	
Std. width (mm)		Std. width (mm)		Std. width (mm)	
	10		10		10
	16		16		16
	25		25		25
	32		32		32
	50		50		50
	75		75		75
	100		100		100
	150		150		150
P	5	P	10	P	20
H	2,7	H	4,5	H	8
H ₁	1,2	H ₁	2,5	H ₁	5
H _t	3,9	H _t	7	H _t	13

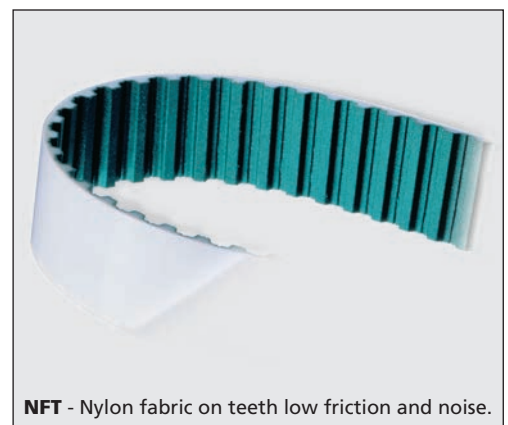

RPP5/RBC5DL		RPP8/RPP8DL		RPP14/RPP14DL	
Std. width (mm)		Std. width (mm)		Std. width (mm)	
	10		10		10
	15		15		15
	20		20		20
	25		25		25
	50		50		50
	85		85		85
	100		100		100
	150		150		150
P	5	P	8	P	14
H	3,8	H	5,4	H	10
H ₁	2	H ₁	3,2	H ₁	6
H _t	5,2	H _t	7,8	H _t	14,5

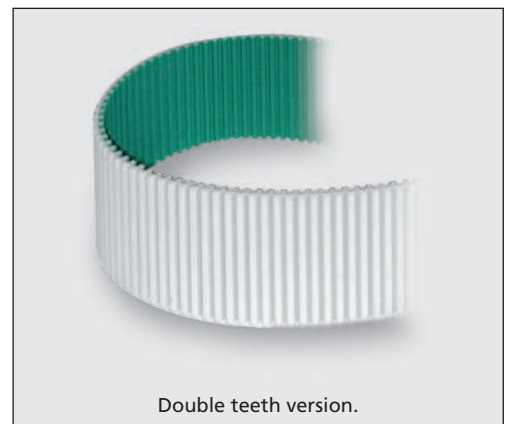

XL/XLDL		L/LDL		H/HDL		XH/XHDL	
Std. width (mm)		Std. width (mm)		Std. width (mm)		Std. width (mm)	
	12,7		12,7		12,7		12,7
	19,1		19,1		19,1		19,1
	25,4		25,4		25,4		25,4
	38,1		38,1		38,1		38,1
	50,8		50,8		50,8		50,8
	76,2		76,2		76,2		76,2
	101,6		101,6		101,6		101,6
	152,4		152,4		152,4		152,4
P	5,08	P	9,525	P	12,7	P	22,225
H	2,3	H	3,6	H	4,3	H	11,2
H ₁	1,27	H ₁	1,9	H ₁	2,29	H ₁	6,35
H _t	3,05	H _t	4,58	H _t	5,95	H _t	15,49

DUNLOP™ PU BELTS
PU ribbed sleeves



DUNLOP™ PU BELTS


PU ribbed sleeves



DUNLOP™ PU ribbed belts are manufactured in polyurethane with polyester high tension cords, which combine the high flexibility of flat belts with the power transmission capability of v-belts.

These belts have the following features

- Dimensional stability
- High flexibility
- Small pulley diameters
- High speeds
- Excellent oil, water and ozone resistance



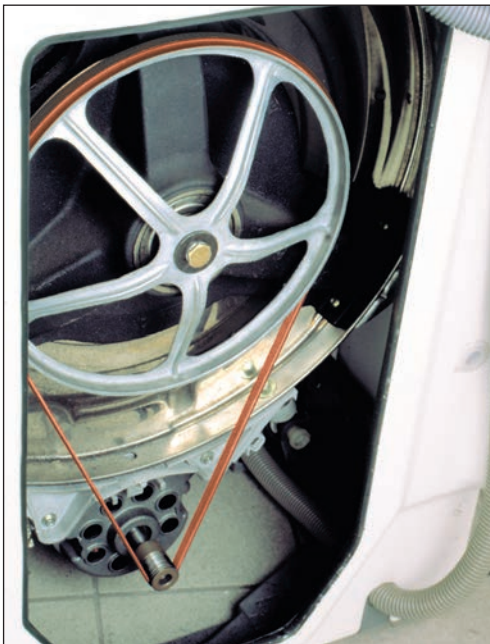


The main applications are

- Food processors
- Grass cutting equipment
- Electrical household appliances
- Washing machines
- Electrical tools
- Woodworking equipment
- Domestic power tools

On request, special elastic Megarib belts can be manufactured in polyurethane with a semi-elastic tension member. They can be fitted on fix centre drives, reducing noise and vibrations. The absence of a tensioning mechanism, offers additional cost savings.

Standard **DUNLOP™ PU** Ribbed belts are available in a wide variety of rib pitches and length (see below).

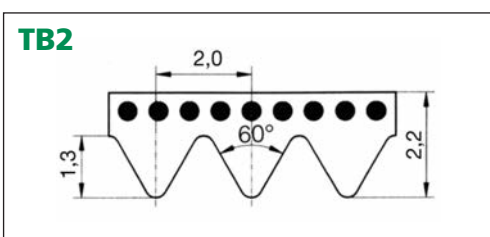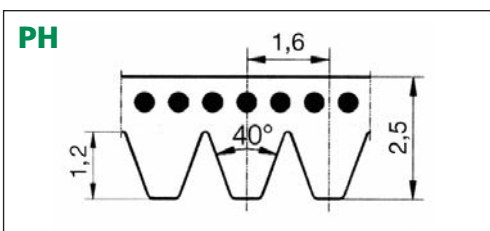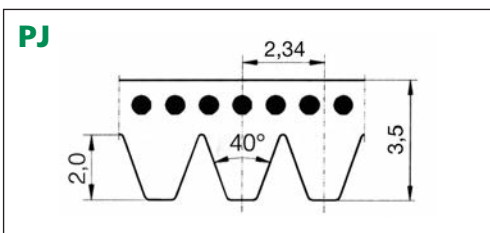


PJ		PH		TB2	
Standard length		Standard length		Standard length	
(mm)	(inches)	(mm)	(mm)	(mm)	(mm)
220	87	223	156		
271	107	261	170		
275	108	295	200		
278	110	330	220		
283	112	340	231		
288	114	375	248		
304	120	389	266		
330	130	400	295		
345	135	410	310		
356	140	485	327		
381	150	507	330		
392	154	588	345		
406	160	602	360		
431	170	609	380		
444	175	650	390		
457	180	768	400		
483	190	935	430		
508	200	1000	480		
558	220	1086	510		
610	240	1120	526		
660	260	1163	535		
681	268	1203	598		
711	280	1240	630		
762	300	1775	660		
864	340	1976	675		
914	360		725		
953	376		770		
1010	398		1186		
1086	428				
1120	440				
1163	458				
1202	474				
1239	488				
1268	500				
1397	590				





AUTHORIZED DEALER



DUNLOP™ INDUSTRIAL BELTS

Europe - Middle-East - Africa - Po Box 43 - 08192 BARCELONA - SPAIN
Tel.: +34 690 148 114 - info@dunloptransmissions.com
Web: www.dunloptransmissions.com