

**TRANSMISSIONS** 



**Mechanical Power Transmission** 









# **MOTOR BASES**

#### **Description**

The fastest and most economical method of securing motors to machine beds. The five sizes are manufactured from galvanised steel and they can accommodate motor frame sizes 63 to 180. They have four slotted holes for fastening the base to the foundation.

Motor base range from SL210 to SL490.

## **Specification**


The fastest and most economical method of securing motors to machine beds. The five sizes are manufactured from galvanised steel and they can accommodate motor frame sizes 63 to 180. They have four slotted holes for fastening the base to the foundation.

### Alignment

The pressed top plate is designed to slide over the base plate preventing vibration and noise whilst ensuring continuous belt alignment. Belts are tensioned by adjusting a single screw.

### **Motor Mount**

The motor is bolted to the two piece top plate which accommodates a wide range of motors. Centre distance adjustments can be made without the need to loosen the motor bolts.

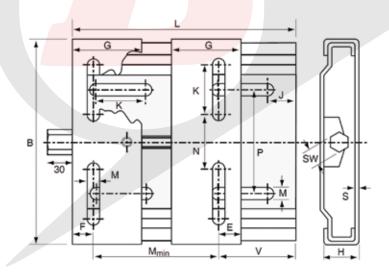

#### **MOTOR BASES**


Part No.	Frame Size	L	В	н	М	G	E	J	К	М	N	Р	sw	S
SL210	63 - 80	210	195	33	100	70	20	25	50.0	10.5	43	98	19	3
SL270	63 - 100	270	195	33	100	70	20	25	50.0	10.5	43	98	19	3
SL340	90 - 132	340	290	39	136	95	27	29	62.5	12.5	90	165	22	4
SL430	90 - 160	430	290	39	136	95	27	29	62.5	12.5	90	165	22	4
SL490	160 - 180	490	409	40	110	95	40	30	60.0	15.0	193	142	22	4







# **TRANSMISSIONS**

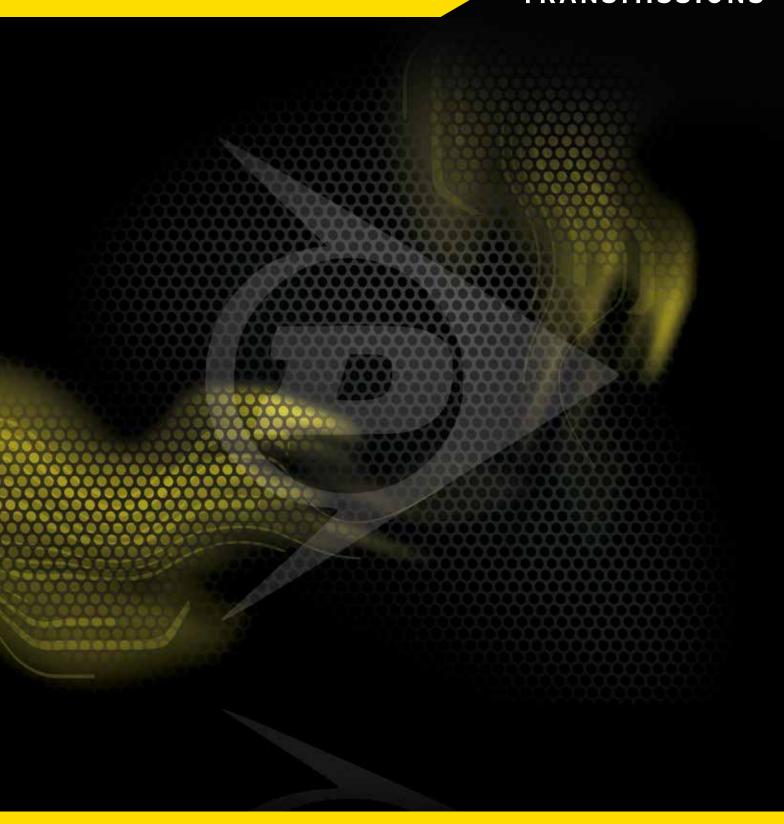

DUNLOP BTL Ltd, MPT House, Brunswick Road, Cobbs Wood Industrial Estate, Ashford, Kent TN23 1EL, UK T: +44 (0)1233 663340 • F: +44 (0)1233 664440 • E: sales@dunlopbtl.com • W: www.dunlopbtl.com